

UT-2788

-
-
-
-
-
-
-




1	RS-232/RS-485/RS-422				
2			460Kbps		
3	4KM	20KM			
4	-40	+85	5%	95%	
5	1310nm(1310nm(
6	RS-232				
	RS-485/422				
		ST	SC/FC		
7	RS-232	RS-232	+/-15KV()ESD	115.2Kbps
8					
9	RS-485/422				15KV(
)ESD	128			

(PIN)		RS-422	RS-485
1	T/R+	(A+)	RS-485 (A+)
2	T/R-	(B-)	RS-485 (B-)
3	RXD+	(A+)	
4	RXD-	(B-)	
5	TXD	RS-232	
6	RXD	RS-232	
7	GND	RS-232	

	nm	1310	1310
	km	4	20
	dBm	-3 -10	-3 -7
	dBm()	-18	-18
	dBm	-3	-3
	dBm/km	0.35	0.35
		SC FC ST	
		460Kbps	
		/	
		AC100 240V/1W	
		DC12-48V/1W	
		-40 85	
		-40 85	
		5% 90%	
		100mm×80mm×34.5mm	



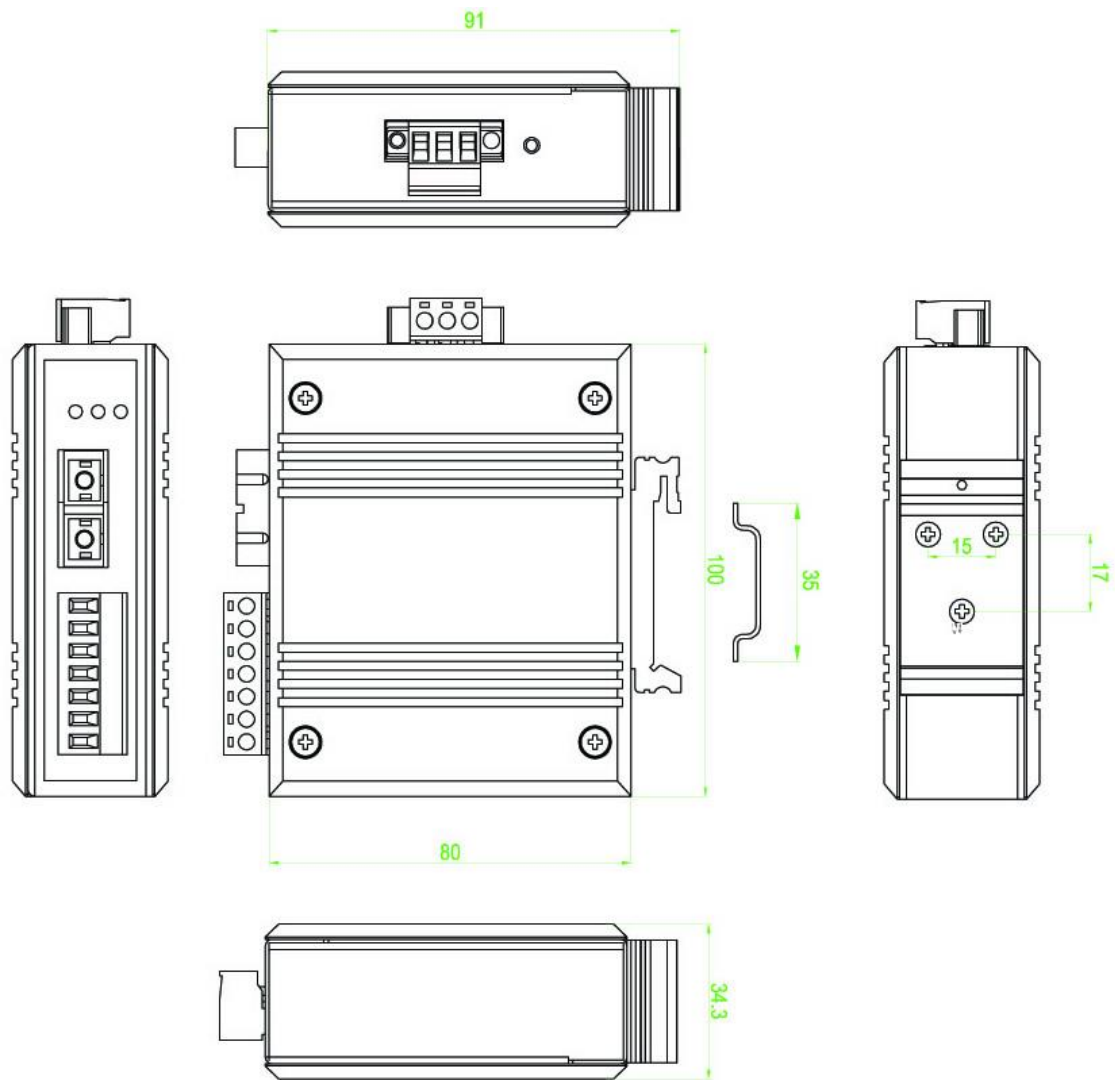

	1PC
	1PC
	3 PCS
	1PC
	1PC



-40 +85 , 5% 95%

