



特点



- 2 RS-232/485/422
- 1 10/100Base-T(x)
- Reset
- RS232 5 RXD, TXD, RTS, CTS, GND
- RS485/422 T/R+, T/R-, R+, R-
- MCP VCCM
- ± 6KV 1.5KVAC
-
- Web


概述

TCP/IP	TCP/IP	TCP/IP	RS-232/485/422
HTTP	ICMP	UDP	ARP
			IP
			TCP

规格

1x DC 3Pin 5.08	ARP	IP	ICMP	UDP	TCP	HTTP	DHCP	MODBUS
1x RJ45 1x 10/100Base-T(x)								
2x RJ45 RS232/RS485/RS422	VCCM	MCP	TCP Server	TCP Client	UDP Client	Modbus TCP		
LED PWR RUN , DATA1, DATA2	Server	Modbus TCP Client						
1 RESET								
12-48VDC								
1.2W								
IP30								
248g								
x x 100mm x 80mm x 30mm								
RS-232 15m								
RS-485/422 1200m								
-40-85° C								
-40-85° C								
5% -95% ()								
	EMC	EN 55032/24						
	EMI	Class A						
	ESD	6KV, 8KV						
	RS	3V/m						
	EFT	2KV, 1KV						
	Surge	2KV 1KV						
	CS	3V/m						

尺寸

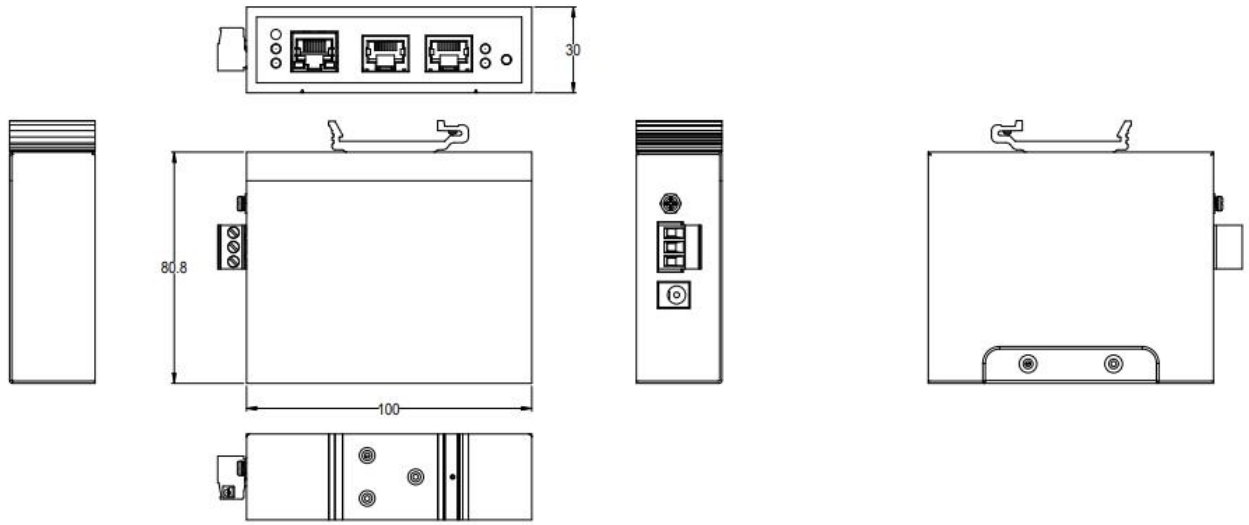

订购信息
