

千兆三层网管型交换机（机架式）



UT-RT6312U 系列

千兆三层网管型交换机（机架式）



400 1144 149

8

7# 10

+86-755-81202008

+86-755-27886083

www.szutek.com





EN50155
 7 10/100Mbps M12 POE
 5 10/100/1000Mbps M12 4 BYPASS
 G1 G3 Bypass G2 G4 Bypass
 MAC 16K
 SNMPv1/v2c/v3
 QoS
 LLDP
 DHCP DHCP IP
 trap PIS
 PIS
 ARP MAC
 ACL 802.1X
 SSHD DNS IP
 TELNET HTTPS
 VLAN
 Pim-SM,IGMP VLAN Vlan
 UT-Ring STP/RSTP/MSTP
 VRRP RIP OSPF
 Ping Traceroute
 NAT 30M




UT-RT6312U 12 5 M12 7 M12 POE
 PIS

IEEE 802.3 IEEE 802.3u IEEE 802.3x IEEE 802.1p IEEE 802.1Q IEEE 802.1D IEEE 802.1s IEEE 802.1w IEEE 802.1X IEEE 802.3ab IEEE 802.3z IEEE 802.3ad IEEE 802.1ab IEEE 802.3 af IEEE 802.3 at						-40~75 -40~85 5% 95%
SNMP v1/v2c/V3 DHCP Server POE				RMON QoS LLDP ARP POE		440mm× 200mm× 44mm
		NTP				19 1U
SSH	NAT Telnet	ACL 802.1				4kg M5
VLAN						
VRRP	RIP	OSPF				EN50155
/						EMS
		IGMP-Snooping	PIM-SM			IEC(EN)61000-4-2(ESD)
UT-Ring	STP/RSTP/MSTP					IEC(EN)61000-4-3(RS)
Ping	Tracerroute					IEC(EN)61000-4-4(EFT)
		M12 10/100/1000Base-T(x), 8-Pin M12(Female)				IEC(EN)61000-4-5(Surge)
/		MDI/MDI-X	Bypass			IEC(EN)61000-4-6(CS)
/	POE M12	10/100Base-T(x), 4-Pin M12(Female),				IEC(EN)61000-4-8(PFMF)
		MDI/MDI-X	30W POE			IEC 60068-2-27(Shock)
Console	POE CLI	1 3	2 4			IEC 60068-2-32(Freefall)
		RS-232	RJ45			IEC61373
						IEC60068-2-32
						IEC61373
Link /speed						
RUN						
P1 P2						
ALM						
POE	:	POE()				
24VDC(16.8-32VDC) or 110VDC (66-160VDC)						
3 5.08mm						
15W(POE) 90W(POE						
)						


尺寸

单位: $\frac{\text{mm} \pm 1.5}{(\text{inch}) \pm 0.06}$

后视图

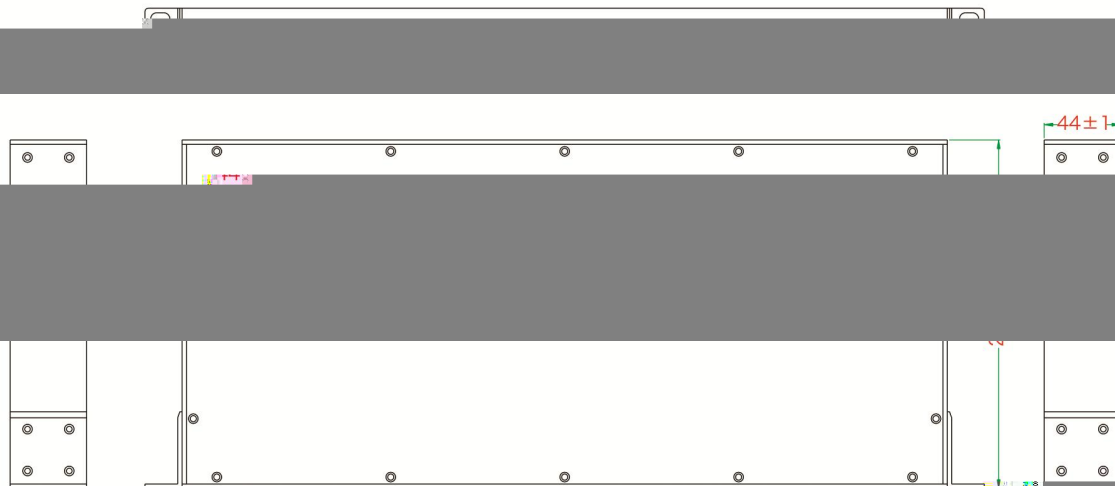

前视图

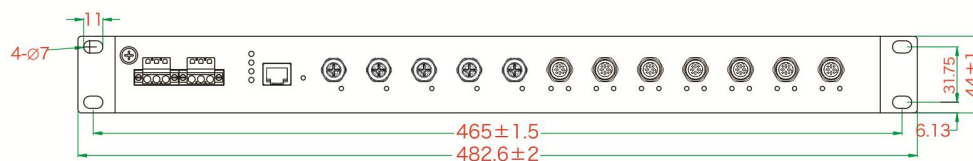

			M12	
	10/100Base-T	10/100/1000Base-T	10/100Base-T	10/100/1000Base-T
UT-RT6312U-7P1GT4GB-2P110	7	5	D-Coded	X-Coded
UT-RT6312U-7P1GT4GBA-2P110	7	5	D-Coded	A-Coded
UT-RT6312U-7P1GT4GB-2P24	7	5	D-Coded	X-Coded
UT-RT6312U-7P1GT4GBA-2P24	7	5	D-Coded	A-Coded

" 2P110

110VDC (66-160VDC)

" 2P24

24VDC(16.8-32VDC)