




# UT-6405GCA-2P

## 5口全千兆非网管型以太网交换机 说明书

### 一、概述

UT-6405GCA-2P 5

### 二、面板描述

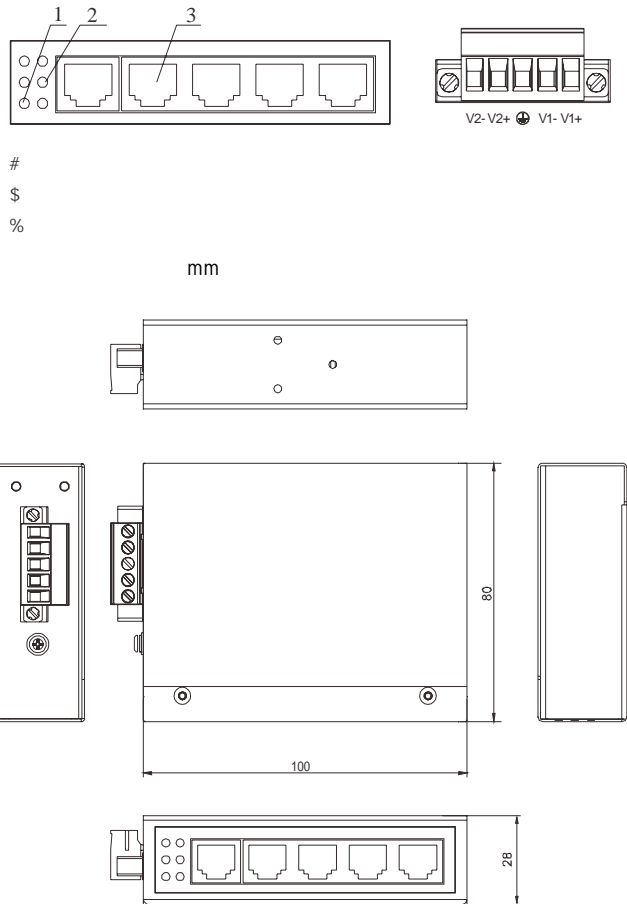

### 三、性能参数

3.1 标准  
IEEE 802.3 10Base-T  
IEEE 802.3u 100Base-TX  
IEEE 802.3ab 1000Base-T  
IEEE 802.3x

3.2 接口  
RJ45 5 10/100/1000Base-TX /  
MDI/MDI-X

LED PWR 1~5

3.3 电源需求  
12/24/48VDC(10.8~52.8VDC)  
120mA@24Vmax  
1 5

3.4 交换性能  
1488095pps

MAC 2K  
1M  
10G  
16KB

3.5 工作环境  
-40 75  
-40 85  
0 95% ( )

3.6 机械特性  
IP40


W x H x D 100mm x 80mm x 28mm

3.7 行业标准  
EMI FCC Part 15 Subpart B class A EN55022 class A  
EMS

IEC(EN)61000-4-2(ESD)  
IEC(EN)61000-4-3(RS)  
IEC(EN)61000-4-4(EFT)  
IEC(EN)61000-4-5(Surge)  
IEC(EN)61000-4-6(CS)  
IEC(EN)61000-4-8  
IEC 60068-2-27(Shock)  
IEC 60068-2-32(Freefall)  
IEC 60068-2-6(Vibration)


### 四、接口定义

4.1 10/100/1000Base-T  
10/100/1000Base-T MDI/MDI-X ( )



RJ45	MDI/MDI-X	PC
2 3 4 5 6 7 8	MDI	1
	MDI-X	1 3 2 6 3 1 6 2 4 7 5 8 7 4 8 5
10/100/1000Base-T		

	MDI	MDI-X
1	BI_DA+/TX+	BI_DB+/RX+
2	BI_DA-/TX-	BI_DB-/RX-
3	BI_DB+/RX+	BI_DA+/TX+
4	BI_DC+/-	BI_DD+/-
5	BI_DC-/-	BI_DD-/-
6	BI_DB-/RX-	BI_DA-/TX-
7	BI_DD+/-	BI_DC+/-
8	BI_DD-/-	BI_DC-/-




" TX± " u " RX± " u " - "

### 五、LED指示灯

PWR		
1~5		1000M
		1000M

### 六、安装指导

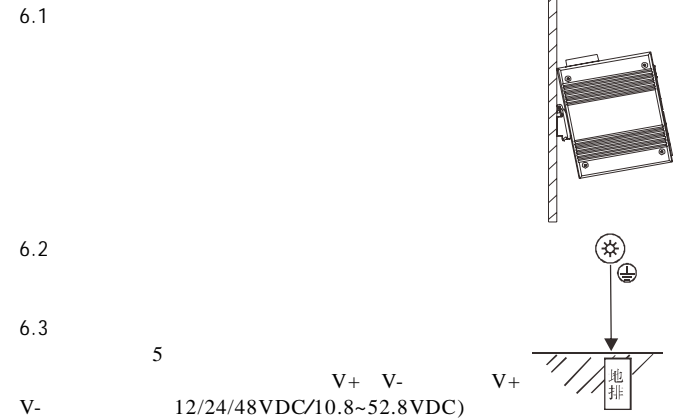

### 七、包装清单

	1PCS
	1PCS
	1PCS
	1PCS