




TEK-6408GCA-2P 8口千兆非网管以太网交换机 说明书

概述

T-6408GCA 8

面板描述

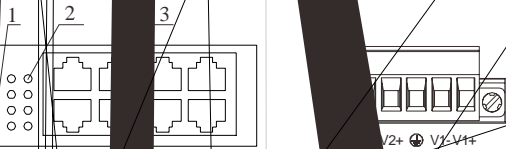

三、性能参数

3.1 标准

IEEE 802.3 10Base-T
IEEE 802.3u 100Base-TX
IEEE 802.3ab 1000Base-T
IEEE 802.3x

3.2 接口

RJ45 8 10/100/1000Base-T / MDI/
MDI-X
LED PWR 1 8

3.3 电源需求

12/24/48VDC(10.8~52.8VDC)
130mA@24Vmax
1 5

3.4 交换性能

1488095pps

MAC

4K
1Mb
16G
16KB

3.5 机械特性

IP40

W x H x D 100mm x 85mm x 40mm

3.6 工作环境

-40 75
-40 85
0 95% ()


3.7 行业标准

EMI FCC Part 15 Subpart B class A EN55022 class A
EMS
IEC(EN)61000-4-2(ESD)
IEC(EN)61000-4-3(RS)
IEC(EN)61000-4-4(EFT)
IEC(EN)61000-4-5(Surge)
IEC(EN)61000-4-6(CS)
IEC(EN)61000-4-8
IEC 60068-2-27(Shock)
IEC 60068-2-32(Freefall)
IEC 60068-2-6(Vibration)

四、接口定义

4.1 10/100/1000Base-T

10/100/1000Base-T MDI/MDI-X

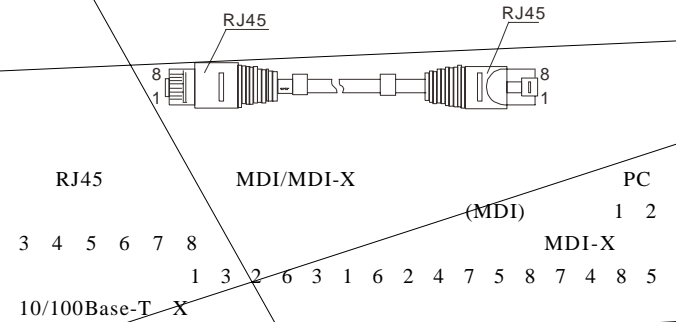

	MDI	MDI-X
1	TX+	RX+
2	TX-	RX-
3	RX+	TX+
6	RX-	TX-
4 5 7 8	-	-

1000Base-T

	MDI	MDI-X
1	BI_DA+/TX+	BI_DB+/RX+
2	BI_DA-/TX-	BI_DB-/RX-
3	BI_DB+/RX+	BI_DA+/TX+
4	BI_DC+/-	BI_DD+/-
5	BI_DC-/-	BI_DD-/-
6	BI_DB-/RX-	BI_DA-/TX-
7	BI_DD+/-	BI_DC+/-
8	BI_DD-/-	BI_DC-/-

" TX± " " RX± " " - "


五、LED指示灯

PWR		
1~8		1000M
		1000M

六、安装指导

6.1

6.2



6.3

5

V-

12/24/48VDC

V+ V-

10.8-52.8VDC

V+



七、包装清单

	1PCS
	1PCS
	1PCS
	1PCS