

# 百兆非网管型以太网交换机




UT-6405C



深圳市宇 泰科技有限 司 公  
全国统一服务热线：400 1144 149

8 7# 10  
+86-755-81202008  
+86-755-27886083  
www.szutek.com



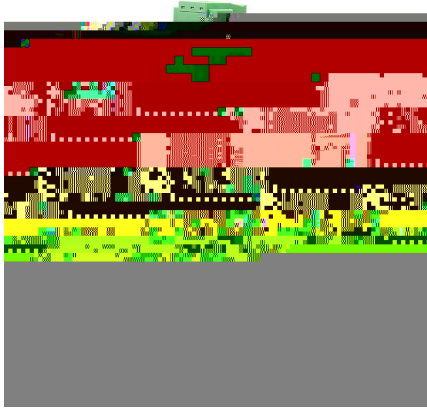

- 
- 
- 10/100Mbps
- 
- 
- -40 75
- 12/24/48VDC(10.8~52.8VDC)



UT-6405C 5

#### 标准

IEEE 802.3 10Base-T  
IEEE 802.3u 100Base-TX

#### 接口

RJ45 10/100Base-TX  
MDI/MDI-X  
LED PWR

#### 电源需求

12/24/48VDC(10.8~52.8VDC)  
100mA@24Vmax

#### 交换性能

148810pps

MAC 1K  
448Kb  
1.6G

#### 机械特性

IP40

W x H x D 100mmx80mmx35mm

#### 包装尺寸

180mmx140mmx45mm  
560g

#### 工作环境

-40 75  
-40 85  
95% ( )

#### 行业标准

EMI FCC Part 15 Subpart B classA EN55022 class A  
EMS  
IEC(EN)61000-4-2(ESD)  
IEC(EN)61000-4-3(RS)  
IEC(EN)61000-4-4(EFT)  
IEC(EN)61000-4-5(Surge)  
IEC(EN)61000-4-6(CS)  
IEC(EN)61000-4-8  
IEC 60068-2-27(Shock)  
IEC 60068-2-32(Freefall)  
IEC 60068-2-6(Vibration)

