



全






- POE(IEEE802.3af/at)
- 10/100/1000Mbps
- -40 5
- 48VDC(46-57V)



UT-6408GC-POE	POE	POE	POE
IEEE 802.3af/at	PD		
		VLAN	POE
			POE
标准	IEEE 802.3af/at	IEEE 802.3 10Base-T	IEEE 802.3u 100Base-T(X)
	IEEE 802.3ab 1000Base-T	IEEE 802.3x	
接口	8 RJ-45(POE)		
	10/100/1000Base-T		
LED	RJ45	POE	
POE	pins	pins	
交换性能	1488095pps		
MAC	4K		
	1Mb		
	16G		
	10KB		
电源需求	46-57VDC		
	5		
功耗	POE 30W	125W	
按键功能	VLAN 1-7		
CCTV	10M	250	
			POE LIM
			POE 30W
			30W(IEEE802.3at POE)
			POE WDT
			PD
			PD
			机械特性
			IP40
			机械尺寸
			W x H x D : 37mm x 150mm x 100mm
			677g
			包装尺寸:
			250mm x 205mm x 55mm
			工作环境
			-40 75
			-40 85
			95% ()
			行业标准
			EMI
			FCC Part 15 CISPR (EN55022) class A
			EMS
			IEC(EN)61000-4-2(ESD)
			IEC(EN)61000-4-3(RS)
			IEC(EN)61000-4-4(EFT)
			IEC(EN)61000-4-5(Surge)
			IEC(EN)61000-4-6(CS)
			IEC(EN)61000-4-8
			IEC 60068-2-27(Shock)
			IEC 60068-2-32(Freefall)
			IEC 60068-2-6(Vibration)

尺寸

mm ± 1
(inch) ± 0.04

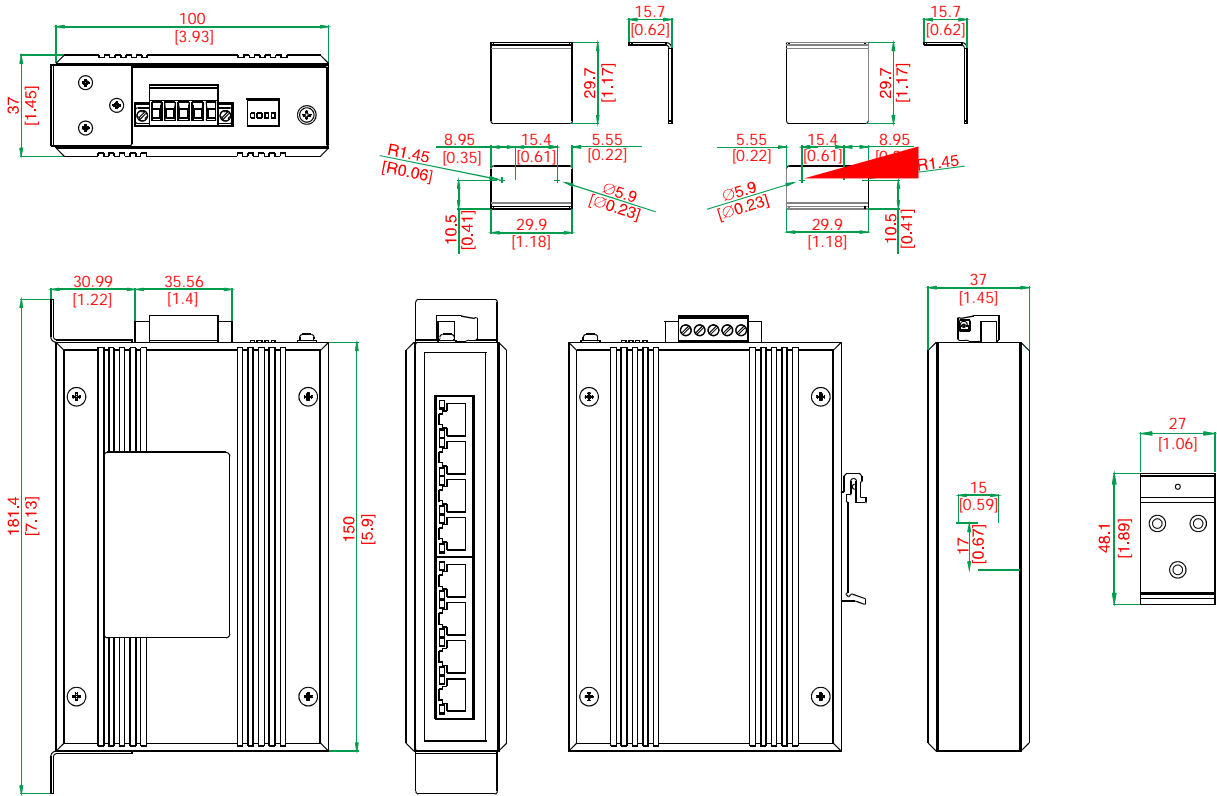

UT-6408GC-POE	10/100/1000Base-T
8	