



# UT-6408CA-2P

## 8口百兆非网管型以太网交换机 说明书

### 一、概述

UT-6408CA-2P 8

### 二、面板描述

mm

#### 3.1 标准

IEEE 802.3 10Base-T  
IEEE 802.3u 100Base-TX

#### 3.2 接口

RJ45 8 10/100Base-TX / MDI/MDI-X

LED PWR 1 8

#### 3.3 电源需求

12/24/48VDC(10.8~52.8VDC)  
100mA@24Vmax  
1 5

#### 3.4 交换性能

148810pps

MAC 1K

448Kb  
1.6G

#### 3.5 机械特性

IP40

W x H x D 100mm x 85mm x 40.2mm

#### 3.6 工作环境

-20 75  
-40 85  
0 95% ( )

#### 3.7 行业标准

EMI FCC Part 15 Subpart B classA EN55022 class A

#### EMS





IEC(EN)61000-4-2(ESD)  
IEC(EN)61000-4-3(RS)  
IEC(EN)61000-4-4(EFT)  
IEC(EN)61000-4-5(Surge)  
IEC(EN)61000-4-6(CS)  
IEC(EN)61000-4-8  
IEC 60068-2-27(Shock)  
IEC 60068-2-32(Freefall)  
IEC 60068-2-6(Vibration)

### 四、接口定义

#### 4.1 10/100Base-TX

10/100Base-TX

MDI/MDI-X

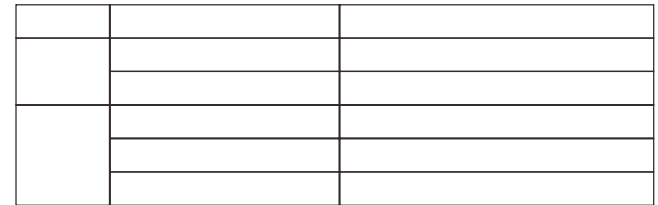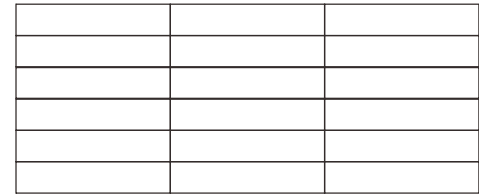

### 三、性能参数