


# 导轨式万兆网管型POE以太网交换机

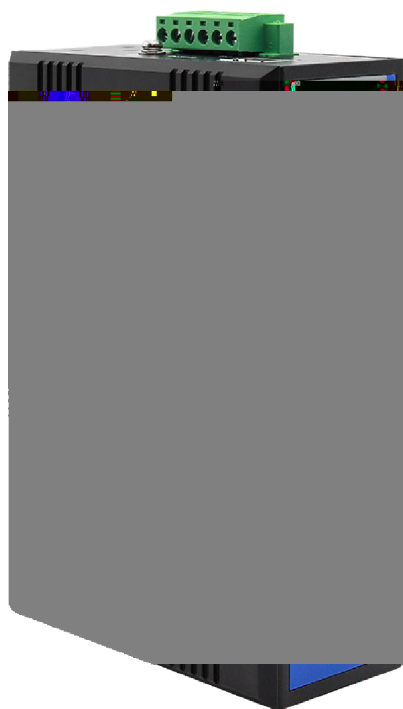

UT-62208G-8GT-2XGP-POE

8G+2XG


POE



全国统一服务热线：400 1144 149

8 7# 10  
+86-755-81202008  
+86-755-27886083  
www.szutek.com



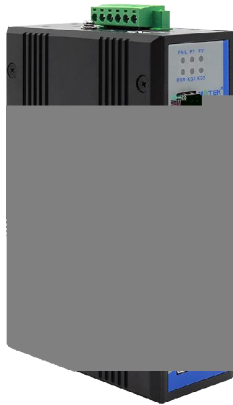

- \* POE +2 10Gbps SFP+
- POE 30W
- IGMP Snooping
- IEEE 802.1Q VLAN
- QoS &
- UT-Ring STP/RSTP MSTP
- SNMPv1/v2c/v3 RMON
- /LACP
- ACL
- 
- 
- 
- 
- 
- 
- -40 ~75
- IP40



UT-62208G-8GT-2XGP-POE (IEEE802.3af/at(POE)) IP 30W	POE	SFP+	POE	10/100/1000Base-T
	-40~75		EMC	

#### 协议标准

IEEE802.3 IEEE802.3u IEEE802.3x IEEE802.3ae  
 IEEE802.3ab IEEE802.1Q IEEE802.1p IEEE802.1D  
 IEEE802.1w IEEE802.1s IEEE802.3ad IEEE802.1x  
 ARP ICMP TCP HTTP/HTTPS Telnet STP/RSTP/  
 MSTP LLDP IGMP SNMPv1/v2c/v3 DHCP Server  
 NTP UT-Ring LACP VLAN ERPS QINQ RMON  
 UDLD  
 IEEE802.3x

#### 接口

10Gbps SFP+( SFP )  
 RJ45 10/100/1000Base-T(X) MDI/MDI-X  
 PoE  
 POE V+,V+,V-,V- 1,2,3,6 ( )  
 Console (RJ45 )  
 2PIN

#### 传输距离

100m  
 1310nm 20/40Km  
 1550nm 60/80/100/120Km  
 1310nm 2Km

#### 交换性能

148810pps  
 1488095pps  
 14881000pps

#### MAC

16K  
 2M  
 56G  
 10KB

#### 电源需求

48VDC(46-57V)

#### 功耗

POE 30W 150W

#### 机械特性

IP40  
 900g  
 W x H x D : 150 mm x 47.6mm x 100mm

#### 包装尺寸

250mm x 205mm x 55mm

#### 工作环境

-40 ~75  
 -40 ~75  
 0~95%

#### 行业标准

EMI  
 FCC Part 15 CISPR (EN55022) class A  
 EMS  
 IEC(EN)61000-4-2(ESD)  
 IEC(EN)61000-4-3(RS)  
 IEC(EN)61000-4-4(EFT)  
 IEC(EN)61000-4-5(Surge)  
 IEC(EN)61000-4-6(CS)  
 IEC(EN)61000-4-8  
 IEC 60068-2-27(Shock)  
 IEC 60068-2-32(Freefall)

