



UT-62026GC-24GT2GP-RNF

全千兆网管型以太网交换机


说明书

一、概述

UT-62026GC-24GT2GP-RNF
 2 24 console CLI
 -40~75 EMC

二、面板描述

UT-62026GC-24GT2GP-RNF

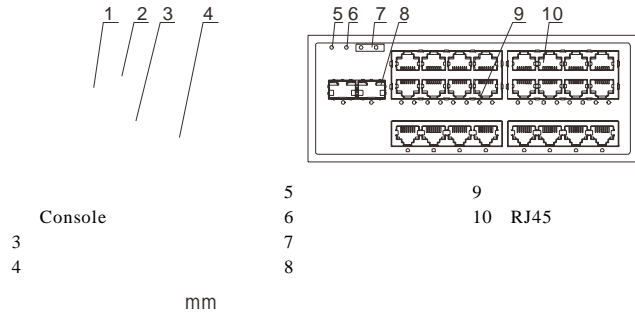

三、主要特性

IGMP Snooping
 Web 100Base-FX 1000Base X
 IEEE 802.1Q VLAN
 QoS
 STP/RSTP/MSTP
 UT-Ring
 SNMPv1/v2c/v3
 trap RMON
 IEEE802.1x
 ACL
 DHCP Server IP
 LLDP Link flap UDLD DDM
 -40~75

四、硬件规格

4.1 协议标准
 IEEE802.3 IEEE802.3u IEEE802.3x IEEE802.3z
 IEEE802.1Q IEEE802.1p IEEE802.1D IEEE802.1W
 IEEE802.1s IEEE802.3ad IEEE802.1x
 ARP ICMP TCP HTTP HTTPS Telnet STP/RSTP/
 MSTP LLDP IGMP SNMPv1/v2c/v3 DHCP Server
 UDLD NTP RMON Syslog
 IEEE802.3x

4.2 接口
 100Base-FX/1000Base-X SFP)
 RJ45 10/100/1000Base-T MDI/MDI-X

4.3 传输距离
 100m
 1310nm 20/40Km
 1550nm 60/80/100/120Km
 1310nm 2Km

4.4 交换性能
 1488095pps

MAC 8K
 4.1Mbit
 52G
 10KB

4.5 电源需求
 12/24/48VDC(10.8~52.8VDC)

4.6 功耗
 650mA@24Vmax()

4.7 机械特性
 IP40
 1600g


4.8 机械尺寸
 : 177mm×133mm×68mm

4.9 工作环境
 -40 ~75
 -40 ~85
 0~95%

4.10 行业标准
EMI
 FCC Part 15 CISPR (EN55022) class A
EMS
 IEC(EN)61000-4-2(ESD)
 IEC(EN)61000-4-3(RS)
 IEC(EN)61000-4-4(EFT)
 IEC(EN)61000-4-5(Surge)
 IEC(EN)61000-4-6(CS)
 IEC(EN)61000-4-8
 IEC 60068-2-27(Shock)
 IEC 60068-2-32(Freefall)

五、接口定义

5.1 10/100/1000Base-T
 10/100/1000Base-T MDI/
 MDI-X



RJ45 MDI/MDI-X PC
 5.2 1000Base-X
 1000Base-X


5.2.1
 (50 62.5 m)

9 10 m)

5.2.2

LC接口类型: SC SC

5.2.3
 LC LC




六、LED指示灯

P1~P2		
ALM		
RUN		

七、安装指导



7.1



7.5




7.6




7.7

default 5

7.2




7.3




7.4

8



八、管理系统登录

- 1 Console 115200 8-N-1
PIN3—TXD PIN4/5—GND PIN6-RXD
- 2 Web IP 192.168.1.254
admin
admin



九、包装清单

	1PCS
	1PCS
	1PCS
	1PCS

Web和CLI使用说明请扫二维码或输入以下网址
<http://download.lvroyal.com/>

