

## UT-503D

RS-232 RS-485/422

1.

- UTEK
- 
- Logo 

2.

- UT-503D
- VER: 01

3.

- RS-232/485/422

4.

1	EIA/TIA	RS-232C	RS-485/RS-422		
2	/RS-232		RS-422/RS-485		
3	RS-232	± 15KV ESD	RS-422	RS-485	600W
4			2500Vrms	500VDC	DC-DC
5					
6	DC9-30V@60mA				
7		PWR	TXD	RXD	
8					
9	115.2Kbps	300m			
	38.4Kbps	2.4Km			
	9600bps	5Km			
10	110mm× 100mm× 25mm				
11	-40	85	5%	95%	
12	0-5,000	115200bps-9600bps			

5.

3	(PIN)	
1		V+
2		V-
3		PGND

RS-232C

3	(PIN)	
1		SOUT (TXD)
2		SIN (RXD)
3		GND

RS-485/RS-422


5	(PIN)		RS-422	RS-485
1		T/R+	(A+)	RS-485 (A+)
2		T/R-	(B-)	RS-485 (B-)
3		RXD+	(A+)	
4		RXD-	(B-)	
5		GND		

6.

7. ( )

8.

- 1. mm
- 2.

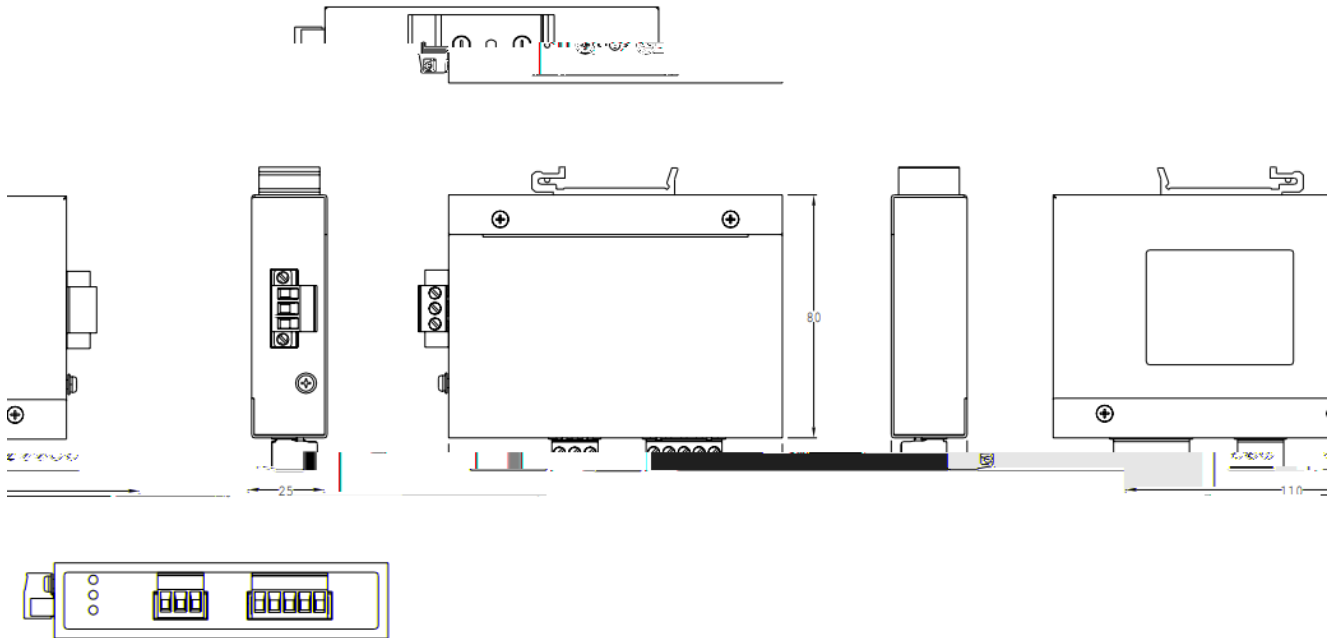

9.

10.

	1PC
	1PC
	3PCS