



# UT-6408M-POE

## 8口百兆网管型POE以太网交换机

### 说明书

#### 概述

UT-6408M-POE 8 POE  
 8 10/100Base-T(X)  
 IEEE802.3af/at(POE)  
 POE ( )  
 IP ) 30W  
 UT-6408M-POE  
 (CLI/Web/Console )

#### 三、主要特性

8 POE  
 STP/RSTP SNMPv1/v2/v3  
 LLDP NTP DHCP  
 CLI console telnet WEB  
 UT-Ring  
 UT-Ring -40~75

#### 四、硬件规格

4.1 标准  
 IEEE 802.3af/at IEEE802.3 IEEE802.3u IEEE802.3x  
 IEEE802.1D IEEE802.1W  
 ARP ICMP TCP HTTP HTTPS Telnet STP/RSTP  
 LLDP SNMPv1/v2c/v3 DHCP NTP Syslog  
 IEEE802.3x

#### 4.2 接口

RJ45 10/100Base-T X 8 POE  
 POE V+, V+, V-, V- 1,2,3,6

#### 4.3 传输距离

100m

#### 4.4 交换性能

148810pps

MAC 2K

#### 4.5 电源需求

2G  
 1632B  
 6PIN  
 48VDC(46-57V)

#### 4.6 功耗

POE 30W 150W

#### 4.7 机械特性

IP40

#### 4.8 机械尺寸

W×H×D : 47.6mm×150mm×100mm

#### 4.9 工作环境


-40 ~75  
 -40 ~85  
 0~95%

#### 4.10 行业标准

EMI FCC Part 15 CISPR (EN55022) class A  
 EMS  
 IEC(EN)61000-4-2(ESD)  
 IEC(EN)61000-4-3(RS)  
 IEC(EN)61000-4-4(EFT)  
 IEC(EN)61000-4-5(Surge)  
 IEC(EN)61000-4-6(CS)  
 IEC(EN)61000-4-8  
 IEC 60068-2-27(Shock)  
 IEC 60068-2-32(Freefall)


#### 五、接口定义

5.1 10/100Base-T X MDI/MDI-X PC



RJ45 MDI/MDI-X MDI MDI-X PC  
 1 2 3 6 1 3 2 6 3 1 6 2 MDI/MDI-X 10Base-T/  
 100Base-TX

	MDI	MDI-X
1	TX+	RX+
2	TX-	RX-
3	RX+	TX+
6	RX-	TX-
4 5 7 8	-	-



" TX±" u " RX±" u " -"


#### 六、LED指示灯

Indicator	Function	Speed
P1-P2	RJ45	100M
	RJ45	10M
	RJ45	Act/Link
	RJ45	10M/100M
	RJ45	Act/Link
ALM		
RUN	/	
POE		POE
	/	POE

#### 七、安装指导

7.1

#### 二、面板描述

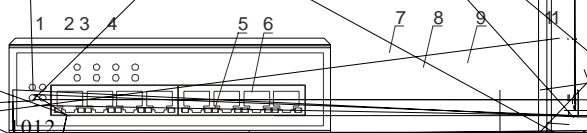

1 2 3 4 5 6 7 8 9 10 11 12  
 POE 10/100Base-T(X) 10/100Base-T(X)  
 7 8 9 10 11 Default 12 Console

