



UT-509D RS-485/RS-422

UT-509D RS-422 RS-485 RS-422/
RS-485 RS-422/RS-485
DC/DC 2500Vrms

RS-422/RS-485 TVS TRANSIENT
VOLTAGE SUPPRESSOR TVS
TVS

600W LIGHTNING ESD
RS-422/RS-485

RS-422 RS-485 I/O
(RTS DTR)

(RS-422) (RS-485)
UT-509D 128 RS-422 RS-485
300bps-115.2Kbps

1 EIA/TIA RS-485/RS-422
2 RS-422/RS-485 5PIN

3 RS-422 RS-485 600W
u 15KV ESD
4 2500Vrms 500DC DC/DC
5
6
7 PWR TXD
RXD
8
9 300bps-115.2Kbps
10 110mm×80mm×25mm
11 -40 85 5%RH 95%RH
12 0-5000 115200bps-9600bps

RS-485/RS-422

(PIN)		RS-422	RS-485
1	T/R+	(A+)	RS-485 (A+)
2	T/R-	(B-)	RS-485 (B-)
3	RXD+	(A+)	
4	RXD-	(B-)	
5	GND1		


RS-485/RS-422

(PIN)		RS-422	RS-485
1	T/R+	(A+)	RS-485 (A+)
2	T/R-	(B-)	RS-485 (B-)
3	RXD+	(A+)	
4	RXD-	(B-)	
5	GND2		

(PIN)		
1	PGND	
2	V-	
3	V+	(9~30VDC)

UT-509D
RS-485 RS-422
T/R+T/R- A+
/B- RXD+/RXD- +/ Ž V+ V-
PGND T/R+ T/R- RXD+ RXD-
T/R-
UT-509D
1 /
2 /
3 /
4 /


120 1/4W

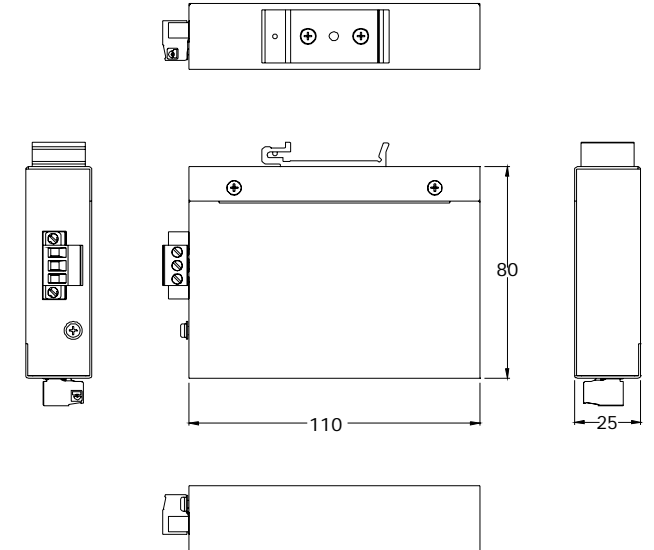

2 RS-485 /

RS-422

1 RS-422 !



2 RS-422 /

RS-485

1

A RS-485/RS-422

B RS-485/RS-422

C

D

E

F

2

A