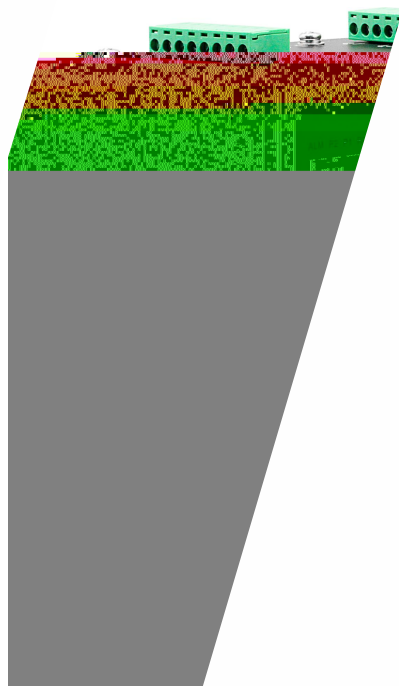

网管型工业以



U
20



全国统一

8





- SFP /ST/FC/SC
- IGMP Snooping
- IEEE 802.1Q VLAN
- QoS (IEEE 802.1p/1Q) TOS/DiffServ
- STP/RSTP MSTP SNMPv1/v2c/v3
-
-
- ACL
-
-
- /RIP/OSPF/VRRP
-
- -40~75



UT-62020G

16

VLAN IGMP Snooping QoS STP/RSTP/MSTP ACL
Console Telnet Web SNMP

/RIP/OSPF/VRRP
于

协议标准

IEEE802.3 IEEE802.3u IEEE802.3x IEEE802.3z
IEEE802.3ab IEEE802.1Q IEEE802.1p IEEE802.1D
IEEE802.1W IEEE802.1s IEEE802.3ad IEEE802.1x
ARP ICMP TCP HTTP HTTPS Telnet STP/
RSTP/MSTP LLDP IGMP SNMPv1/v2c/v3
DHCP Server NTP Syslog
RIP v1/v2 OSPF VRRP

接口

IEEE802.3x
1000Base-X SC/ST/FC/SFP
RJ45 10/100/1000Base-T MDI/MDI-X
LED P1 P2 ALM

传输距离

100m
1310nm 20/40/60Km
1550nm 80/100/120Km
1310nm 2Km

交换性能

1488095pps

MAC 16K

12Mb

40G

9216B

512 IPv4 256(IPv6)

64(IPv4/IPv6)

电源需求

12/24/48VDC(10.8~52.8VDC)
110/220VAC(88~264VAC)/50-60Hz or
110/220VDC(88~264VDC)

功耗

625mA@24Vmax()

机械特性

7SFP 517FC
12/24/48VDC 10.8-52.8VDC
DC 88-264VAC/DC

" BND"