


- 802.3X
- STP/RSTP/MSTP UT-Ring
- IGMP Snooping V1/V2/V3
- VLAN IEEE 802.1Q VLAN
- ! †
- QOS COS DSCP 4 WRR SP
- ACL 802.1X
- CLI WEB SNMP
- UT-Ring

UT-62208F console CLI % + Ž
-40~85 EMC

IEEE 802.3u	IEEE 802.3z	IEEE 802.3	IEEE 802.1D	400mA@24Vmax()
IEEE 802.1W	IEEE 802.1s	IEEE 802.3x	IEEE 802.1Q	
IEEE 802.1p	IEEE 802.1x			IP40
RJ45	100Base-FX	SC/FC/ST		W x H x D : 150 mm x 47.6mm x 100mm
LED	1000Base-X	SC/FC/ST/SFP		250mm x 205mm x 55mm
	10/100Base-T(X)	MDI/MDI-X		930g
	100m			-40 -85
	1310nm 20/40/60Km			-40 -85
	1550nm 80/100/120Km			0~95%
	1310nm 2Km			
MAC	148810pps			EMI
	1488095pps			FCC Part 15 CISPR (EN55022) class A
	8K			EMS
	1Mb			IEC(EN)61000-4-2(ESD)
	7.6G			IEC(EN)61000-4-3(RS)
	1632B			IEC(EN)61000-4-4(EFT)
	12/24/48VDC(10.8~52.8VDC)			IEC(EN)61000-4-5(Surge)
	110/220VAC(88~264VAC)/50-60Hz			IEC(EN)61000-4-6(CS)
	or 110/220VDC(88~264VDC)			IEC(EN)61000-4-8
				IEC 60068-2-27(Shock)
				IEC 60068-2-32(Freefall)

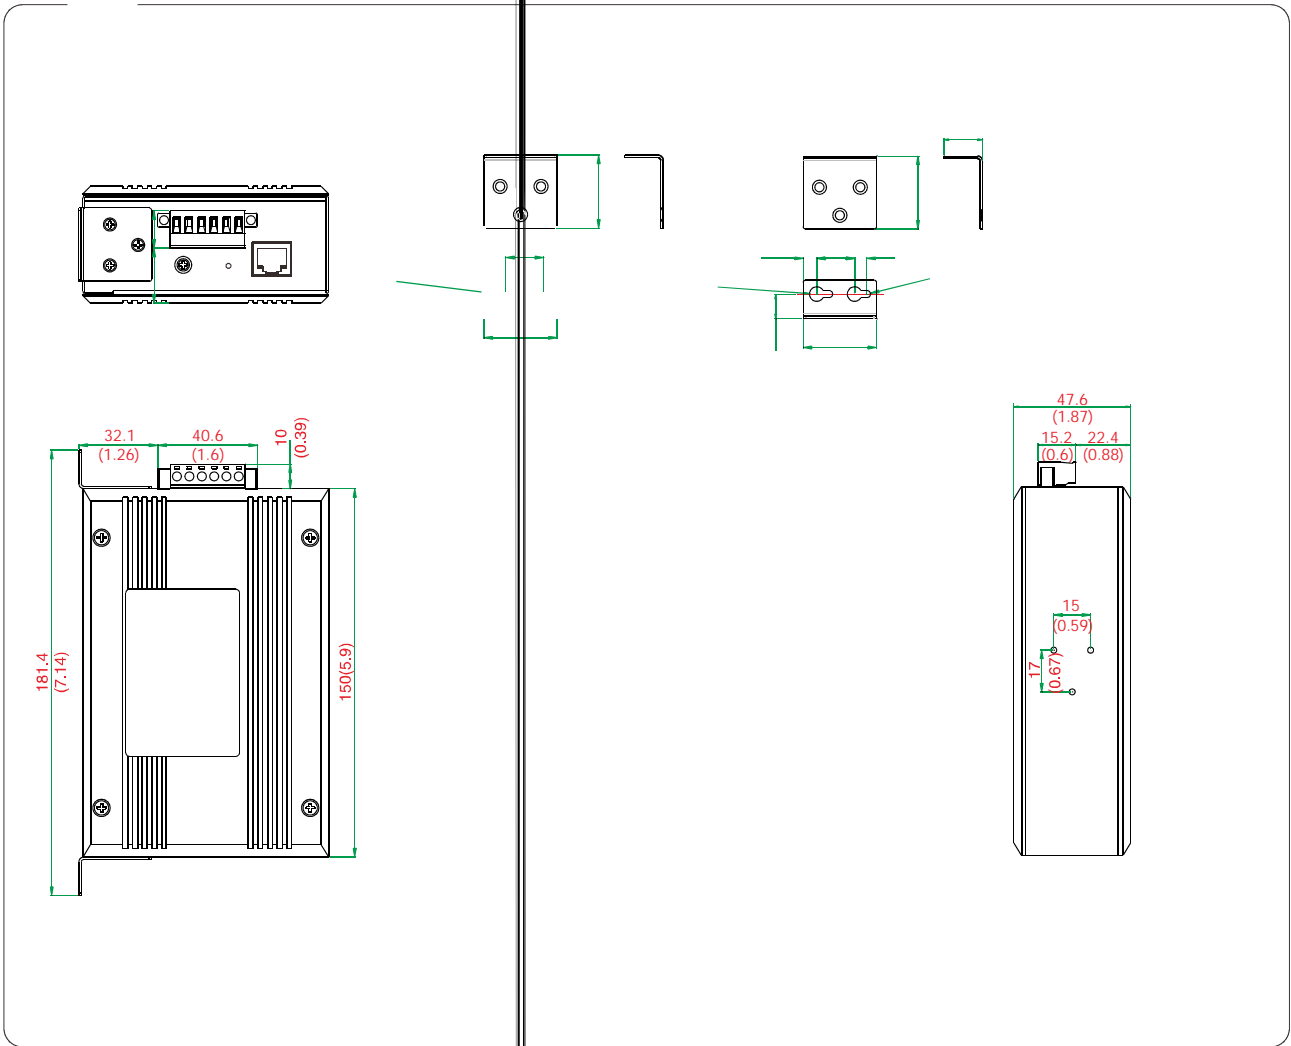

	100Base-FX	1000Base-X	10/100Base-T(X)	100Base-FX	1000Base-X

\$ SC ST/FC
 % " MNF" " F" 12/24/48VDC 10.8~52.8VDC " MND"
 " D" 110/220VAC/DC 88~264VAC/DC