
		/	/		
	A0		2023-03-15		

1.	4
2.	4
3.	4
4.	4
5.	5
6.	5
7.	5
8.	6
9.	7
10.	7
11.	8
12.	8

1.

-
-
-



2.

-6804 -

3.

-
-
-
-
-
-
-

12 48

4 485 422

300-921600

/

/

4.

	-6804 -
	32 400
	128
	10/100 1.5 / - 45
	-485 -422
	-005 3 5.08
	12 48
	1
	2

	30
	-40 85 -40 85 5% 95%
	161 91 37
	350

5.


	A B
	/ , /
	300-921600
	5 6 7 8
	1 2

6.

	55032/24
	32 15B A
	61000-4-2 4 8
	61000-4-3 80 -1 3 /
	61000-4-4 1 0.5
	61000-4-5 1 2 1.2/50
	1 2 10/700
	-232/485/422 0.5 1 10/700
	61000-4-6 150 -80 3 /


7.

1




1	+
2	
3	-

2



3 45



A

100B -

1	B	A+/-	+	B	B+/- +
2	B	A-/-	-	B	B-/- -
3	B	B+/-	+	B	A+/- +
4		-			-
5		-			-
6	B	B-/-	-	B	A-/- -
7		-			-
8		-			-


8.



-6804 -

9.

161 0.5 91 0.5 37 0.5

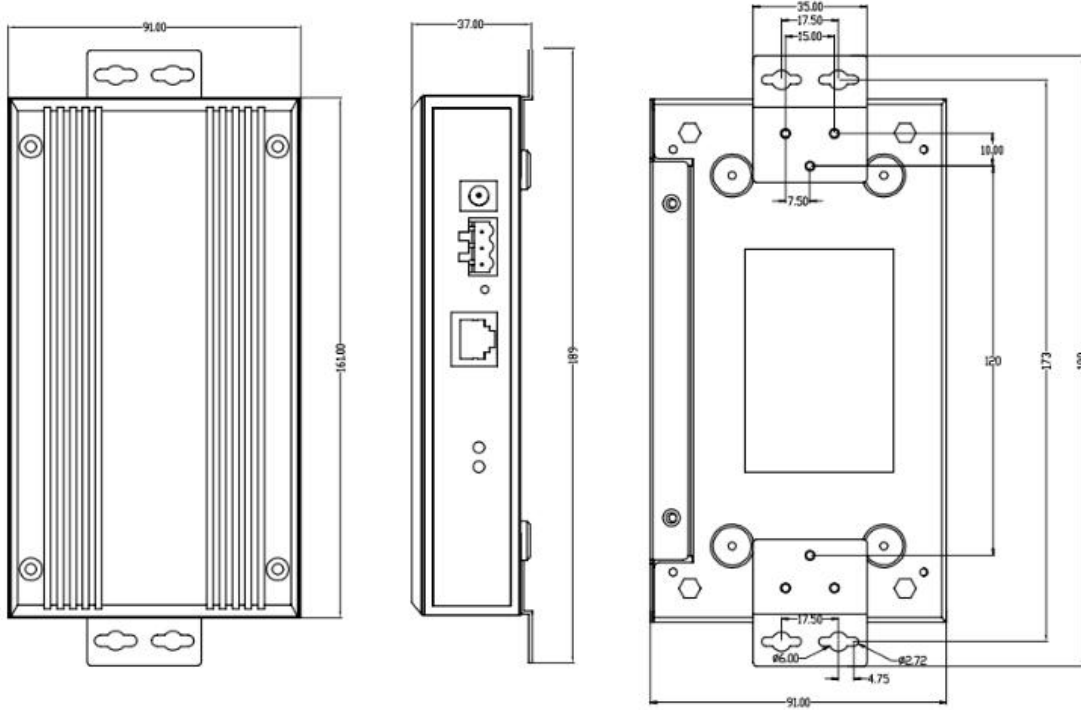

10.




型号Model : UT-6804MT-GW
名称 : 10/100M转4口RS-485/422串口服务器
Product Name : 10/100M To 4-Port RS-485/422 Serial Device Server
输入电压Input Voltage : 12~60VDC(10.8~52.8VDC)
电源功耗Power Consumption : 180mA@12Vmax

This device complies with Part 15 of the FCC rules.
 Operation is subject to the following conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received including interference that may cause undesired operation



11.

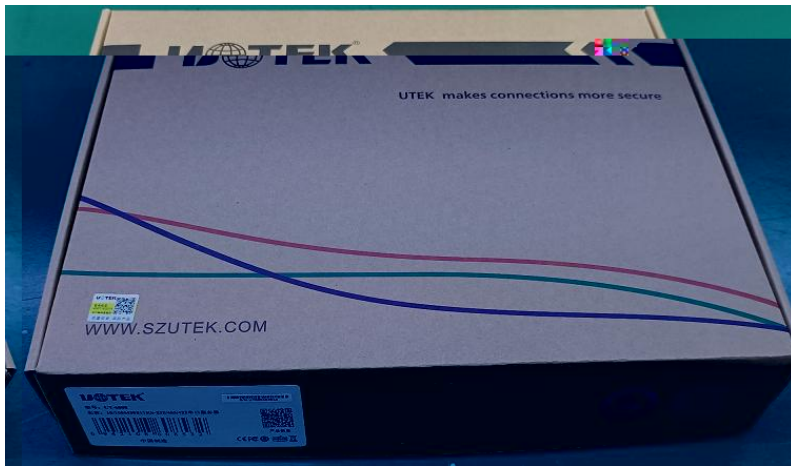

12.

-6804 -	1
	1
	1
	2