

导轨式非网管型工业以太网交换机

UT-60208F系列

8+2G



全国统一服务热线：400 1144 149

8 7# 10
+86-755-81202008
+86-755-27886083
www.szutek.com



-
- 10/100Base-T(X) † ! MDI/MDI-X
- -40~85 EMC
- IP40
-
-
-



UT-60208F

%

+

-40~85

EMC

协议标准

IEEE 802.3u IEEE 802.3z IEEE 802.3 IEEE 802.3x

接口

100Base-FX SC/FC/ST
 1000Base-X SC/FC/ST/SFP
 RJ45 10/100Base-T(X) MDI/MDI-X

LED指示灯

传输距离

100m

1310nm 20/40/60Km
 1550nm 80/100/120Km
 1310nm 2Km

交换性能

148810pps
 1488095pps

MAC

8K
 1Mb
 7.6G
 1632B

电源需求

12/24/48VDC(10.8~52.8VDC)
 110/220VAC(88~264VAC)/50-60Hz
 or 110/220VDC(88~264VDC)

功耗

400mA@24Vmax()

机械特性

IP40

机械尺寸

W x H x D : 150 mm x 47.6mm x 100mm

包装尺寸

250mm x 205mm x 55mm

910g


工作环境

-40 ~85
 -40 ~85
 0~95%

行业标准

EMI
 FCC Part 15 CISPR (EN55022) class A
 EMS
 IEC(EN)61000-4-2(ESD)
 IEC(EN)61000-4-3(RS)
 IEC(EN)61000-4-4(EFT)
 IEC(EN)61000-4-5(Surge)
 IEC(EN)61000-4-6(CS)
 IEC(EN)61000-4-8
 IEC 60068-2-27(Shock)
 IEC 60068-2-32(Freefall)

尺寸

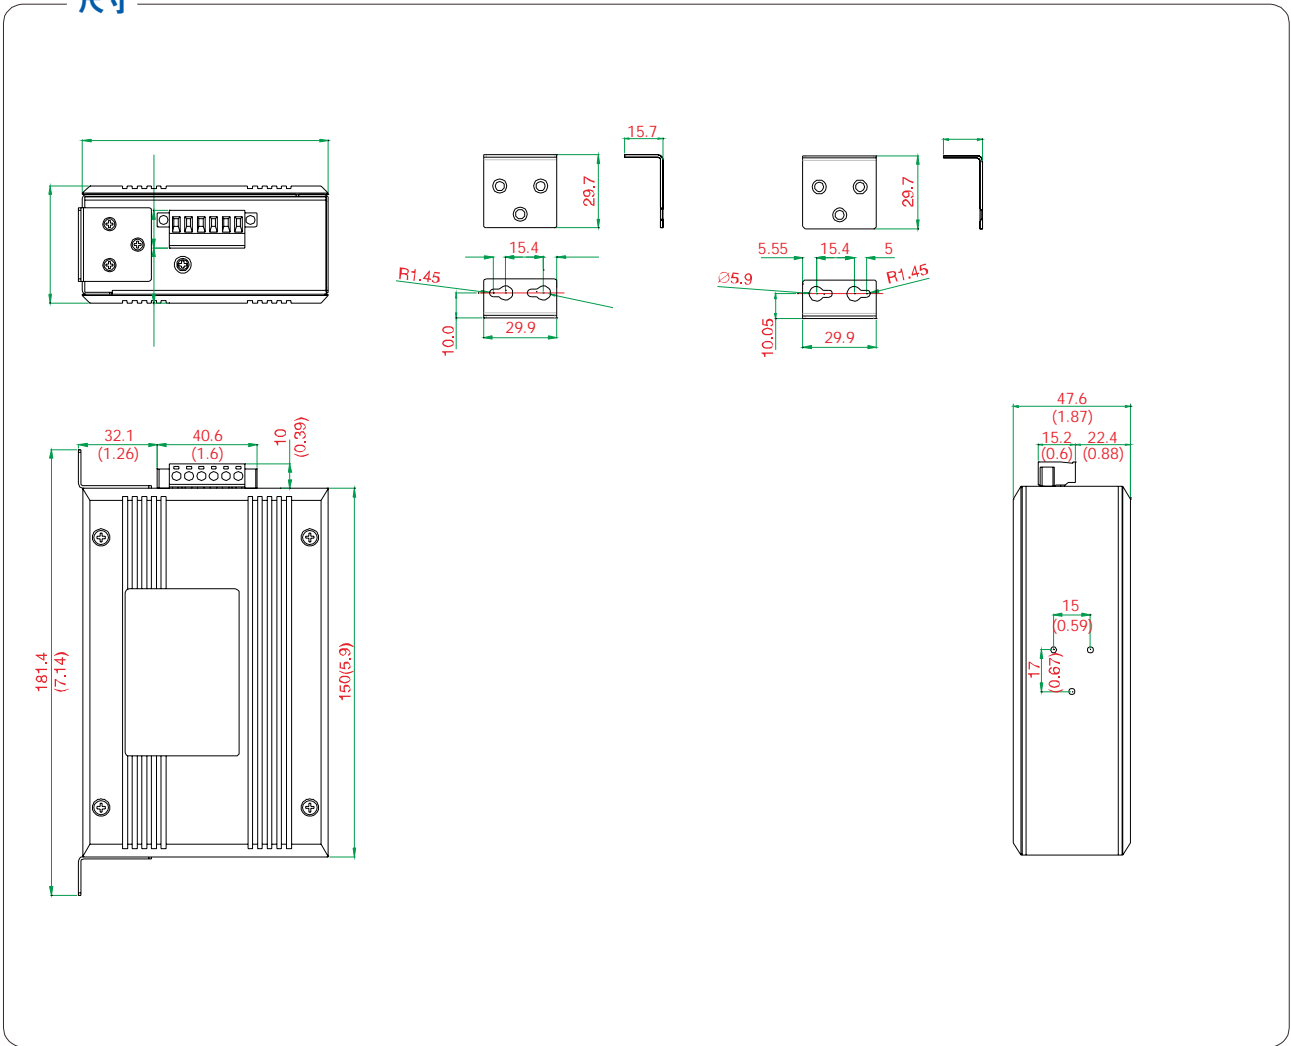

	100Base-FX	1000Base-X	10/100Base-T(X)	100Base-FX	1000Base-X

备注:

\$ SC ST/FC
 % " MNF" " F" 12/24/48VDC 10.8~52.8VDC " MND"
 " D" 110/220VAC/DC 88~264VAC/DC