

百兆网络光纤收发器



UT-2572系列



全国统一服务热线：400 1144 149

8 7# 10
+86-755-81202008
+86-755-27886083
www.szutek.com



bps 100Mbps

12/24/48VDC(10.8-52.8VDC)
SC ST FC SFP



UT-2572

10/100Base-TX

100Base-FX

-20~75

EMC

标准

IEEE 802.3 10Base-T
IEEE 802.3u 100Base-TX 100Base-FX

接口

RJ45	100Base-FX	SC	ST	FC	SFP	
MDI-X	10/100Base-TX					MDI/
LED	PWR			FDX		
RJ-45						

交换性能

148810pps

MAC

1K
448Kb
0.6G

电源需求

12/24/48VDC(10.8-52.8VDC)
60mA@24Vmax

机械特性

IP40

机械尺寸

包装尺寸


180mm x 140mm x 45mm
0.33kg

工作环境

-20 75
-40 85
95%

行业标准

EMI FCC Part 15 Subpart B class A EN55022 class A
EMS
IEC(EN)61000-4-2(ESD)
IEC(EN)61000-4-3(RS)
IEC(EN)61000-4-4(EFT)
IEC(EN)61000-4-5(Surge)
IEC(EN)61000-4-6(CS)
IEC(EN)61000-4-8
IEC 60068-2-27(Shock)

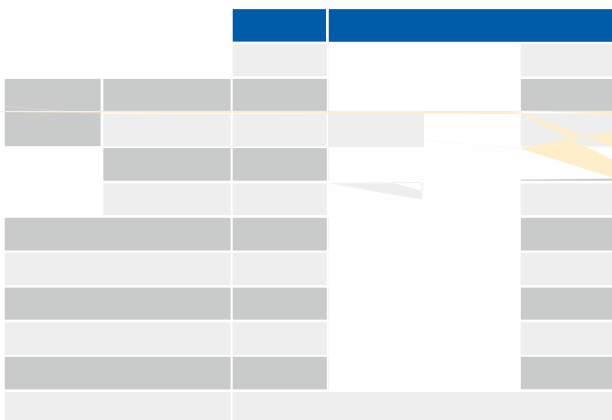



EK[®]

