

机架式非网管型工业以太网交换机



UT-60424F系列


24+4G



全国统一服务热线：400 1144 149

8 7# 10
+86-755-81202008
+86-755-27886083
www.szutek.com



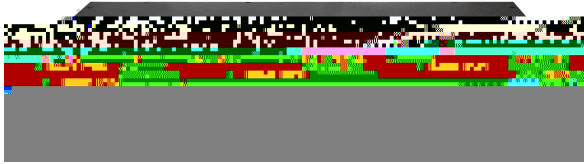

- 28
- SC/ST/FC/SFP
- ! MDI/MDI-X
- & &
- -40 ~85
- IP40



UT-60424F

-40~85

EMC

协议标准

IEEE802.3 IEEE802.3u IEEE802.3z IEEE802.3ab
IEEE802.3x

接口

100Base-FX SC/FC/ST
1000Base-X SC/FC/ST/SFP
RJ45 10/100Base-T(X) 10/100/1000Base-T

MDI/MDI-X

LED指示灯

RJ45

传输距离

100m

1310nm 20/40/60Km
1550nm 80/100/120Km
1310nm 2Km

交换性能

148810pps
1488095pps

MAC

8K

3Mb
12.8G
2KB

电源需求

110/220VAC(88~264VAC)/50-60Hz or
110/220VDC(88~264VDC)

功耗

30W

机械特性

IP40

4440g

机械尺寸

W×H×D : 440mm×44mm×315mm

包装尺寸

530mm×390mm×108mm

工作环境

-40 ~85

-40 ~85

0~95%

行业标准

EMI

FCC Part 15 CISPR (EN55022) class A

EMS

IEC(EN)61000-4-2(ESD)

IEC(EN)61000-4-3(RS)

IEC(EN)61000-4-4(EFT)

IEC(EN)61000-4-5(Surge)

IEC(EN)61000-4-6(CS)

IEC(EN)61000-4-8

IEC 60068-2-27(Shock)

IEC 60068-2-32(Freefall)