

UT-732I

PCI

1.

- UTEK
-
- Logo 

2.

- UT-732I
- VER: 01

3.

- & RS-485/422 PCI

4.

- DR44 %
- 32 bit Universal PCI
- RS-422: T/R+, T/R-, RXD, GND
- RS-485: Data+(A) Data-(B)GND
- 300Bps-921.6Kbps
-) * + 8
- % 1.5 2
- None Even odd Space Mark
- RTS/CTS XON/XOFF
- -40 85
- 2500Vrms 500DC DC/DC
- RS-422 , RS-485 2KV ± 15KV
- RS-485/422 1.2KM
- Wi n98/2000, Wi nXP/2003/Vi sta/2008/7/8/8. 132/64, DOS/Li nux2. 4/2. 6


5.

DB9针型：RS-485/RS-422输出信号引脚分配(Port1-Port2)


DB9 针型	输出信号	RS-422全双工接线	RS-485半双工接线
--------	------	-------------	-------------



DB9 PIN

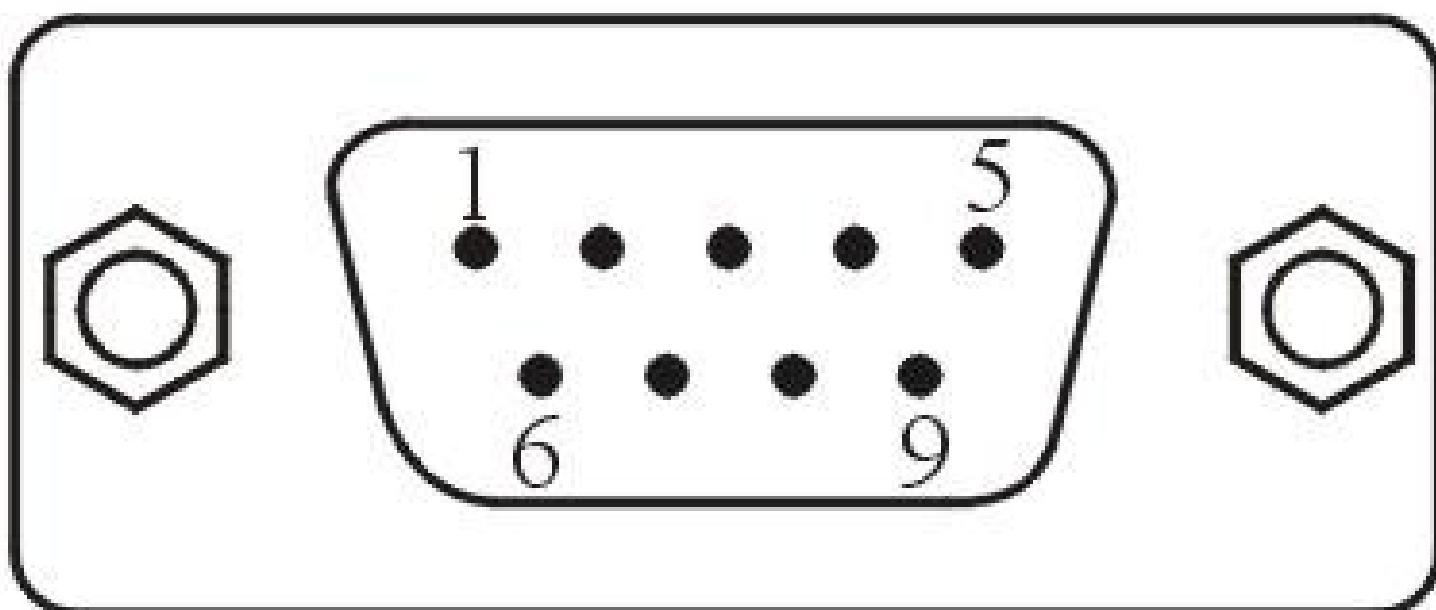


6.

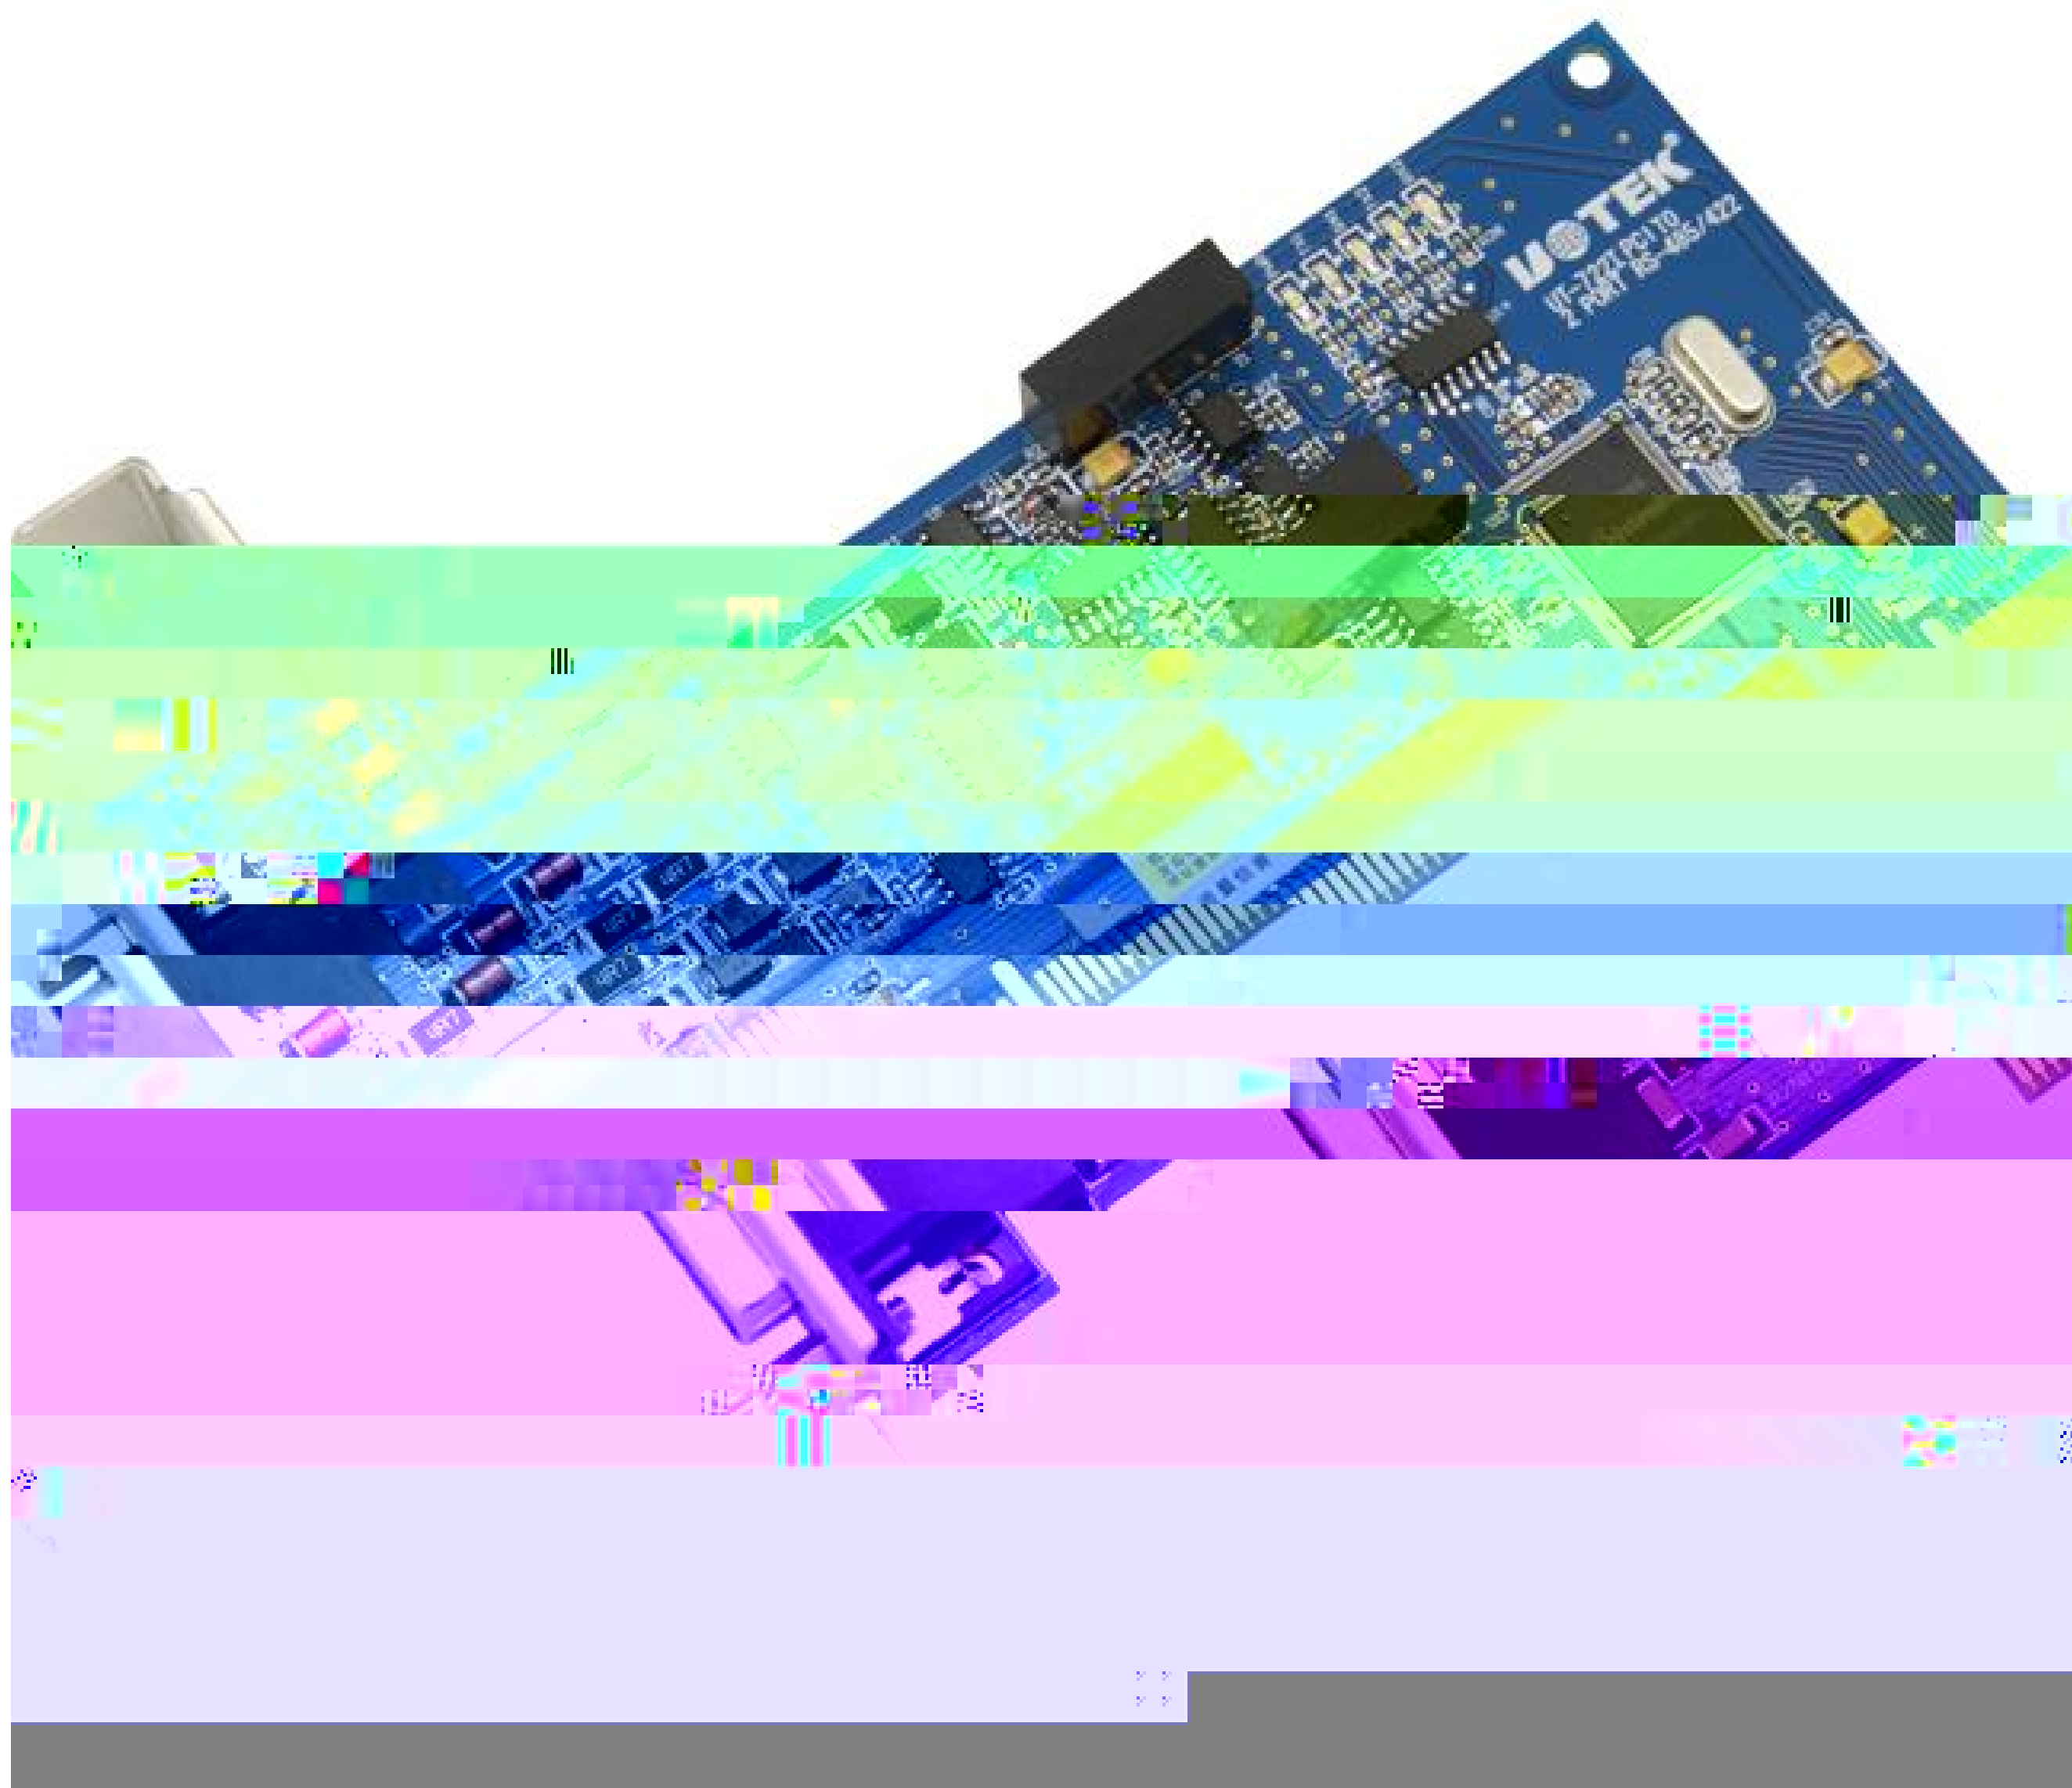

7.

8.

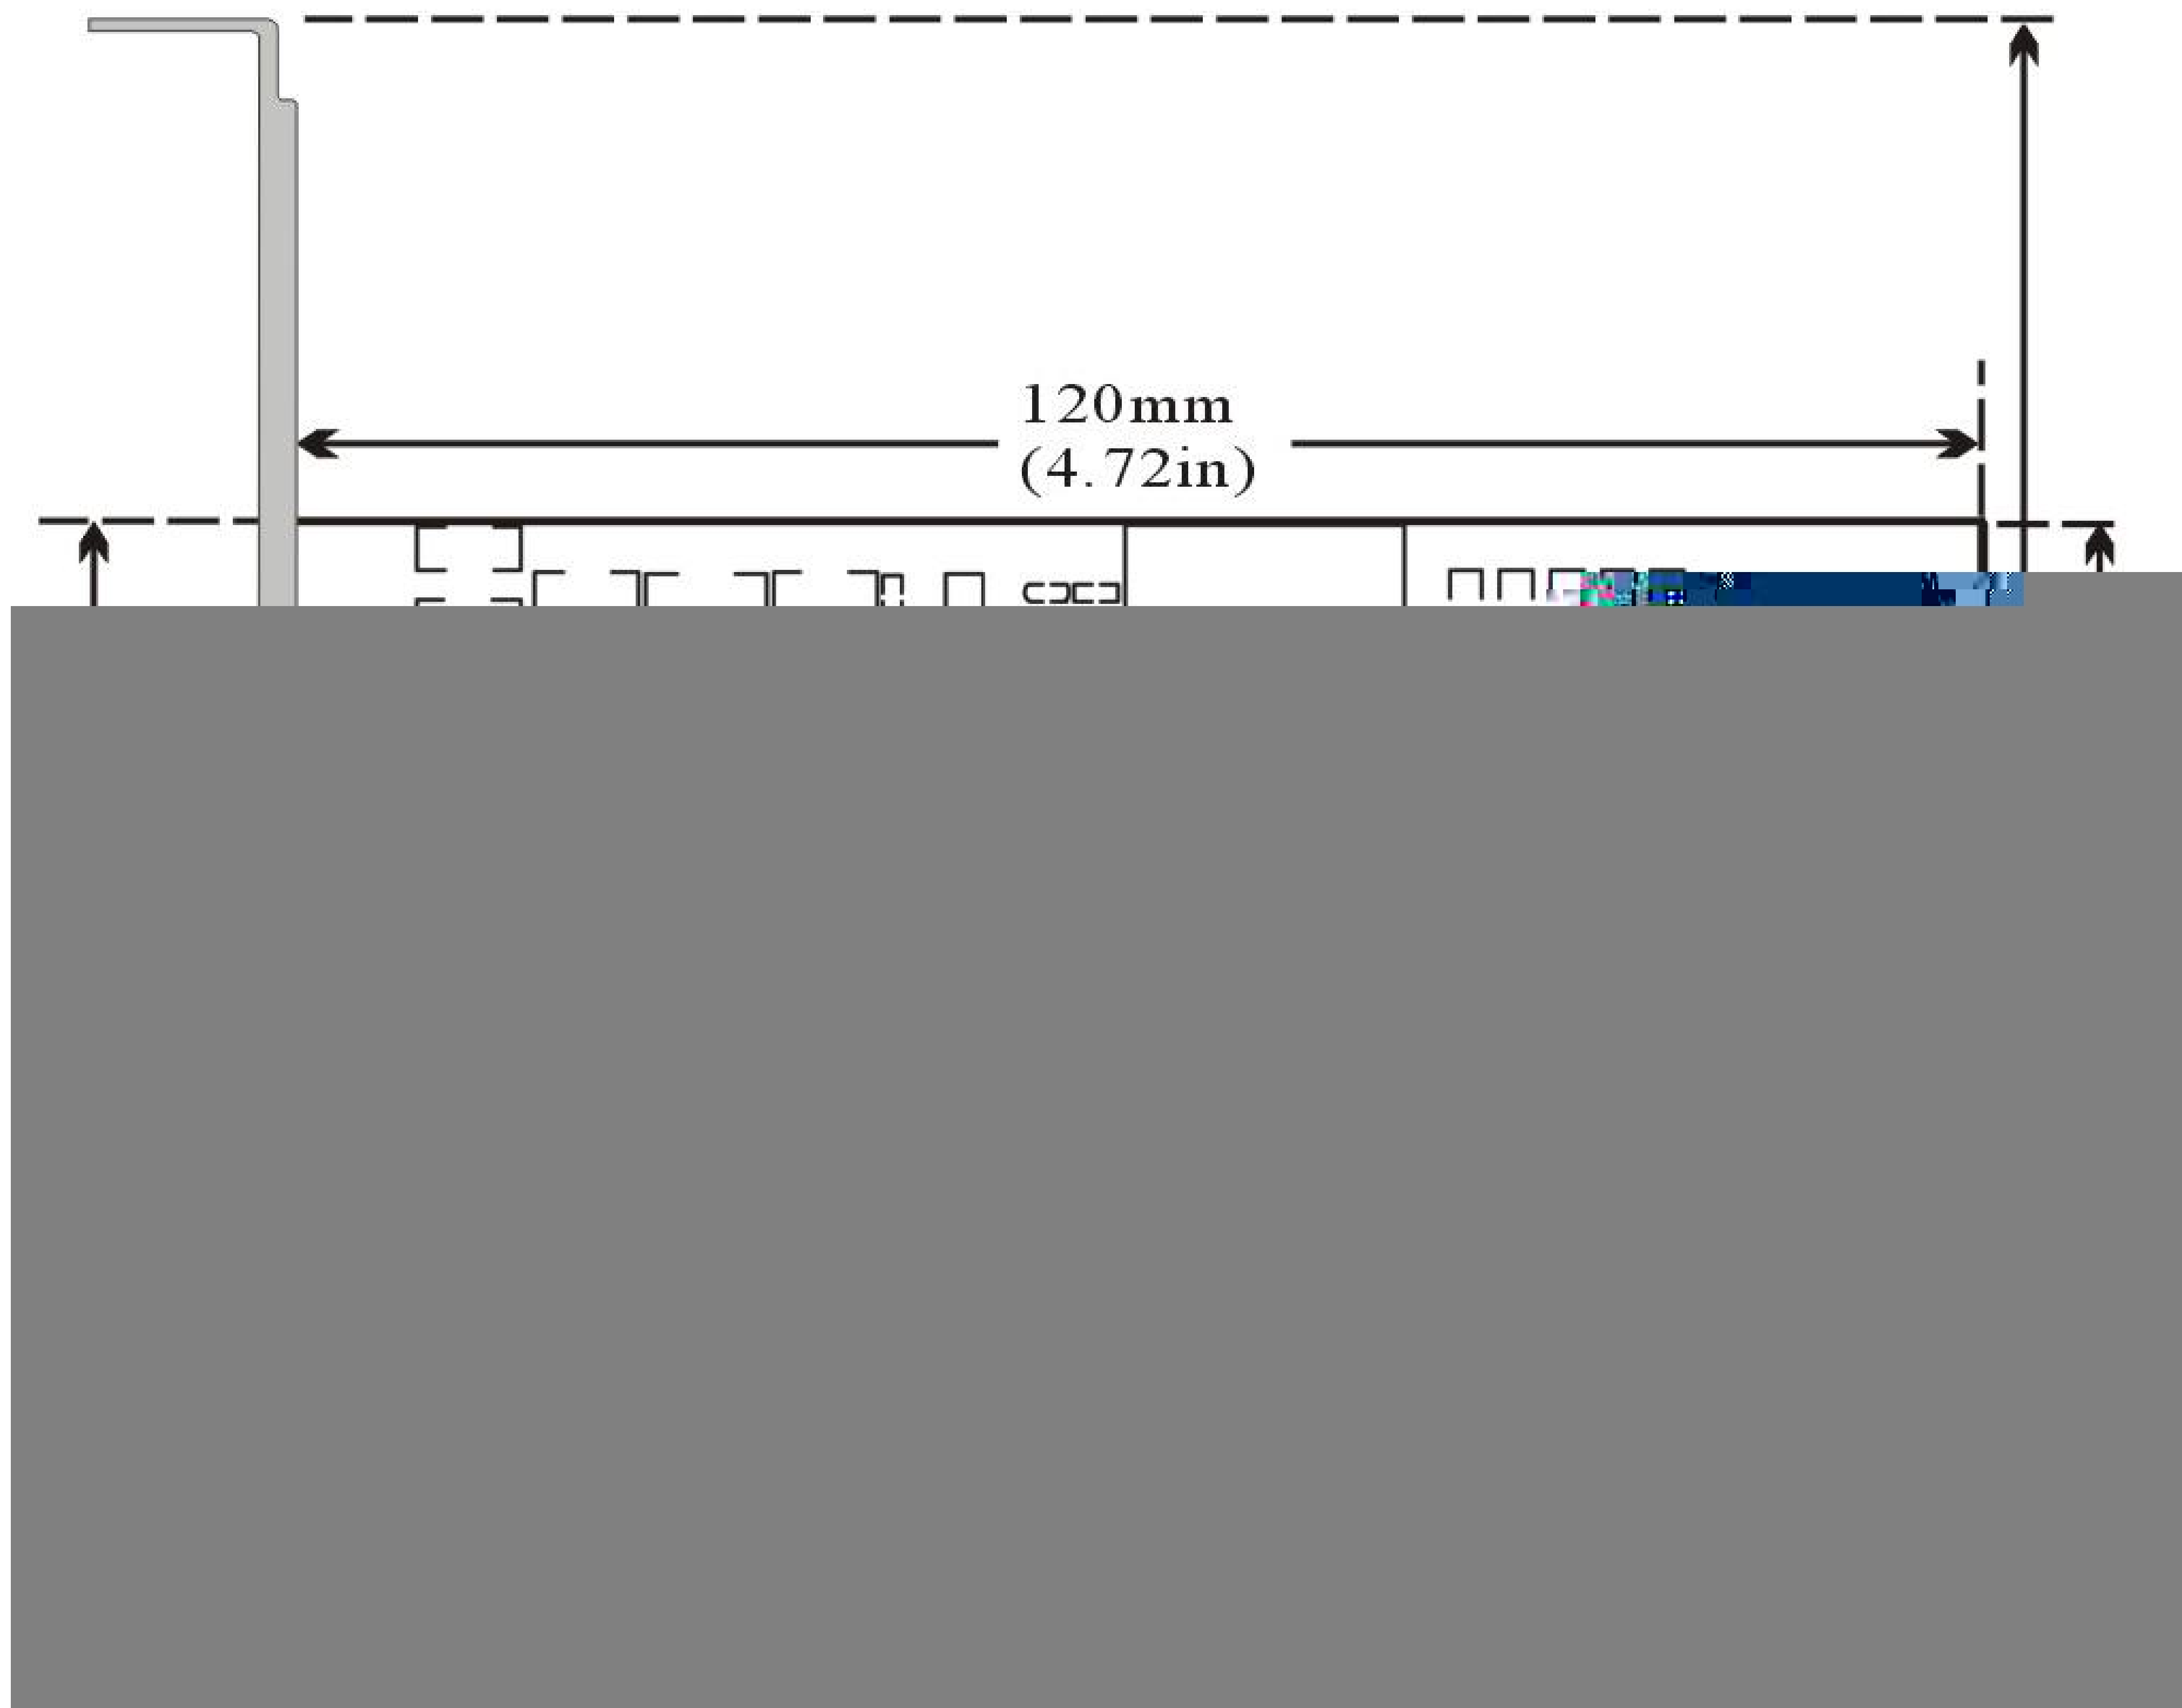

9.

10.

	1PCS
	1PCS
CD	1PCS
	1PCS
	1PCS

11.



250*205*55mm

12.

-40 85 , 5% 95%

13. # #

14.

15.