


# 百兆网络光纤收发器



## UT-2601系列

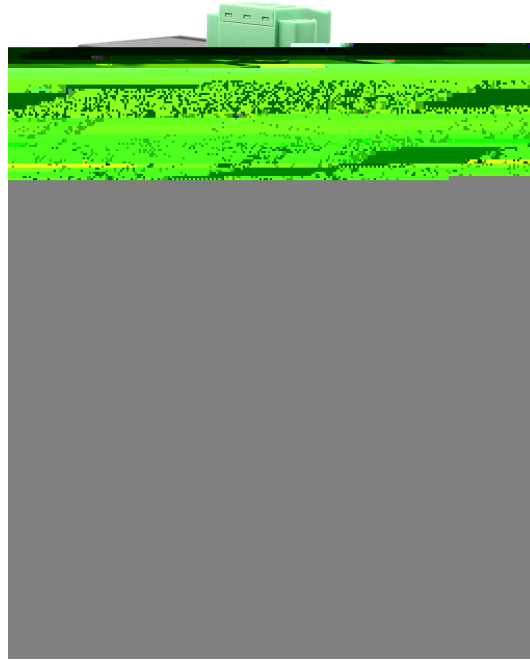

全国统一服务热线：400 1144 149

8 7# 10  
+86-755-81202008  
+86-755-27886083  
www.szutek.com





- 
- 
- 10Mbps 100Mbps
- 
- 
- -40 85
- 12/24/48VDC(10.8-52.8VDC)
- SC ST FC SFP



UT-2601	兆	10/100Base-TX	100Base-FX兆	兆
	兆		EMC	功
		-40-85		

**标准**

IEEE 802.3 10Base-T  
IEEE 802.3u 100Base-TX 100Base-FX

**接口**

兆 100Base-FX SC ST FC SFP  
RJ45 10/100Base-TX MDI/  
MDI-X

: 10M/100M DPX2兆  
DPX1 LFP兆

LED PWR FDX兆 DPX2兆  
DPX1 DPX1 RJ

		100Base-FX			
		1310	1310	1310双	1550
(T)	nm	1310	1310	双310	双490
	nm	1550	1550	1550	1550
(R)	nm	1550	1550	1550	双550
	nm	1310	1310	1310	1490
	km	2	20	40	80
	dBm	-15~-2	-15~-2	双5-0	-5-0
	dBm( )	-32	-34	-34	-34
兆	dBm	-3	-3	-3	-3
兆	dBm/km	0.5	0.5	0.3	0.25
		10/100Mbps			双

UT-2601RSM-SC-40 -R-

-SM-  
-SC-兆 SC  
-40-全 40km

50/125 62.5/125  
8.3/125 9/125 10/125

**交换性能**

148810pps 双 双

MAC 1K  
288Kb  
9K

**电源需求**

12/24/48VDC(10.8-52.8VDC)  
100mA@24Vmax

**机械特性**

IP40

**机械尺寸**

100mm x 80mm x 35mm

**包装尺寸**

180mm x 140mm x 45mm

400g

**工作环境**

-40 85  
-40 85  
95%

**行业标准**

EMI FCC Part 15 Subpart B class A EN55022 class A  
EMS  
IEC(EN)61000-4-2(ESD)

