

## UT-202D


- 
- 
- 
- 
- 
- 
- 
- 




1		EIA/TIA	RS-232C	RS-422	
2	RS-232	DB9		RS-422	DB9
3					
4					
5		300-115.2kbps			
6	63mm	33mm	16mm		
7	-25	70		5%	95%
8	1,200	RS-485	9600bps	5	RS-232

DB9 Female(PIN)	RS-232C
1	
2	SOUT (TXD)
3	SIN (RXD)
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI

DB9 Male(PIN)		RS-422
1	T/R+	(A+)
2	T/R-	(B-)
3	RXD+	(A+)
4	RXD-	(B-)
5	GND	
6	VCC	+5V

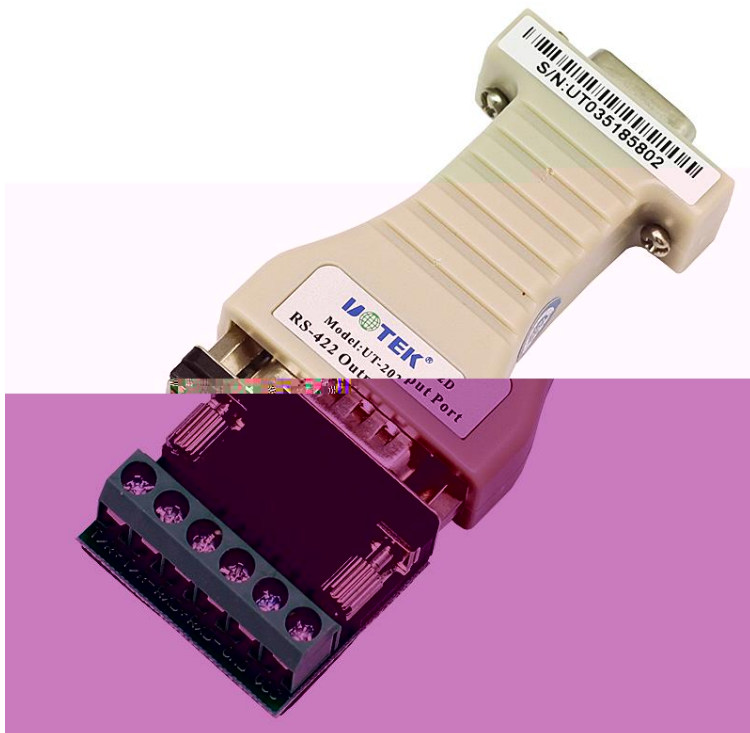



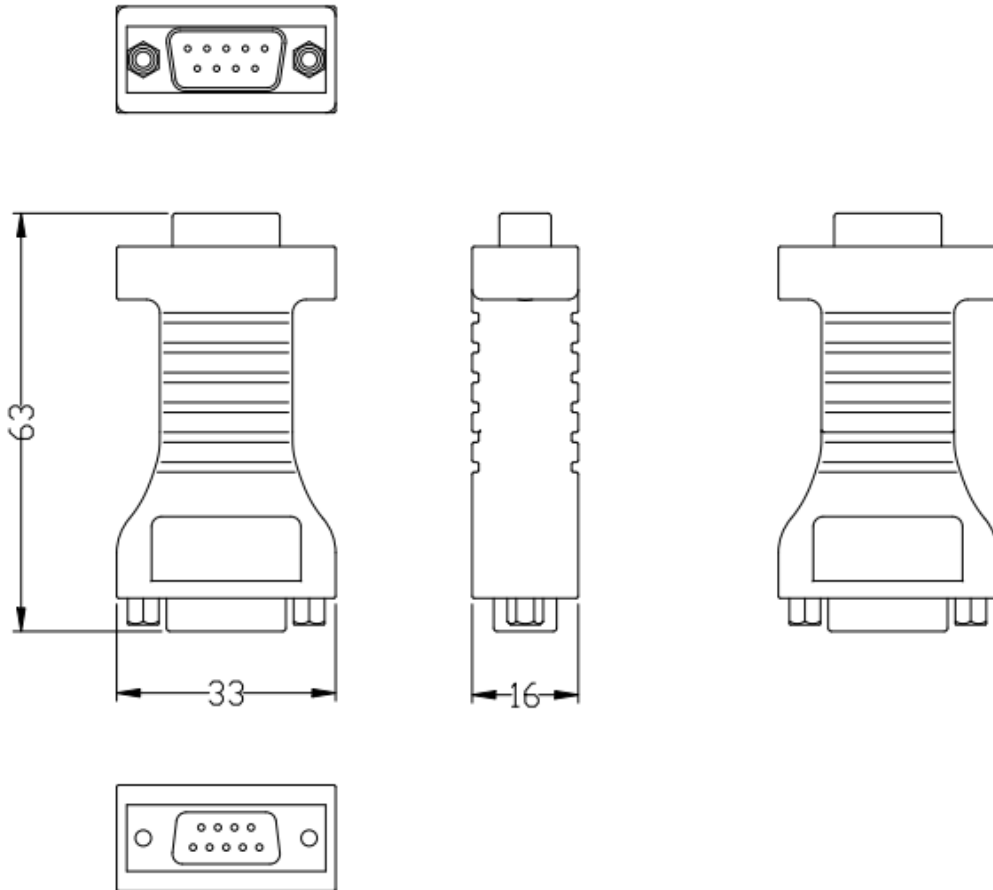

**RS-232 ↔ RS-422**  
Data Communications  
Interface Converters

**CE FC**

**UOTEK**<sup>®</sup>

Model:UT-202D

**RS-422 Output Port**

	1PCS
	1PCS
	1PCS



-40 +85 , 5% 95%