

UT-2216

1.

- UTEK
-
- Logo 

2.

- UT-2216
- VER: 01

3.

- RS-232/485

4.

	EIA/TIA	RS-232C	RS-485		
RS-232	DB9		RS-485	DB9	/RJ45
RS-485	600W		.		
		(PWR)	(TXD)	(RXD)	
115.2K BPS	300M				
38.4K BPS	600M				
9600 BPS	1.2KM				
97mmX87mmX22mm± 1mm					
-25	70		5%	95%	
10	1200	115200bps-9600bps			

11

RS-232C

DB9 / (PIN)	RS-232C
1	
2	SOUT (TXD)
3	SIN (RXD)
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI


RJ-45

RS-485


DB9 (PIN)	RJ-45(PIN)		RS-485
1	1	T/R+	RS-485 (A+)
2	2	T/R-	RS-485 (B-)
3	3	N/C	
4	6	N/C	
5	4 5 7 8	GND	
6		VCC	

9-24 0 TD /B 1056 Tf [(9-24 0 TD /B 105

5.

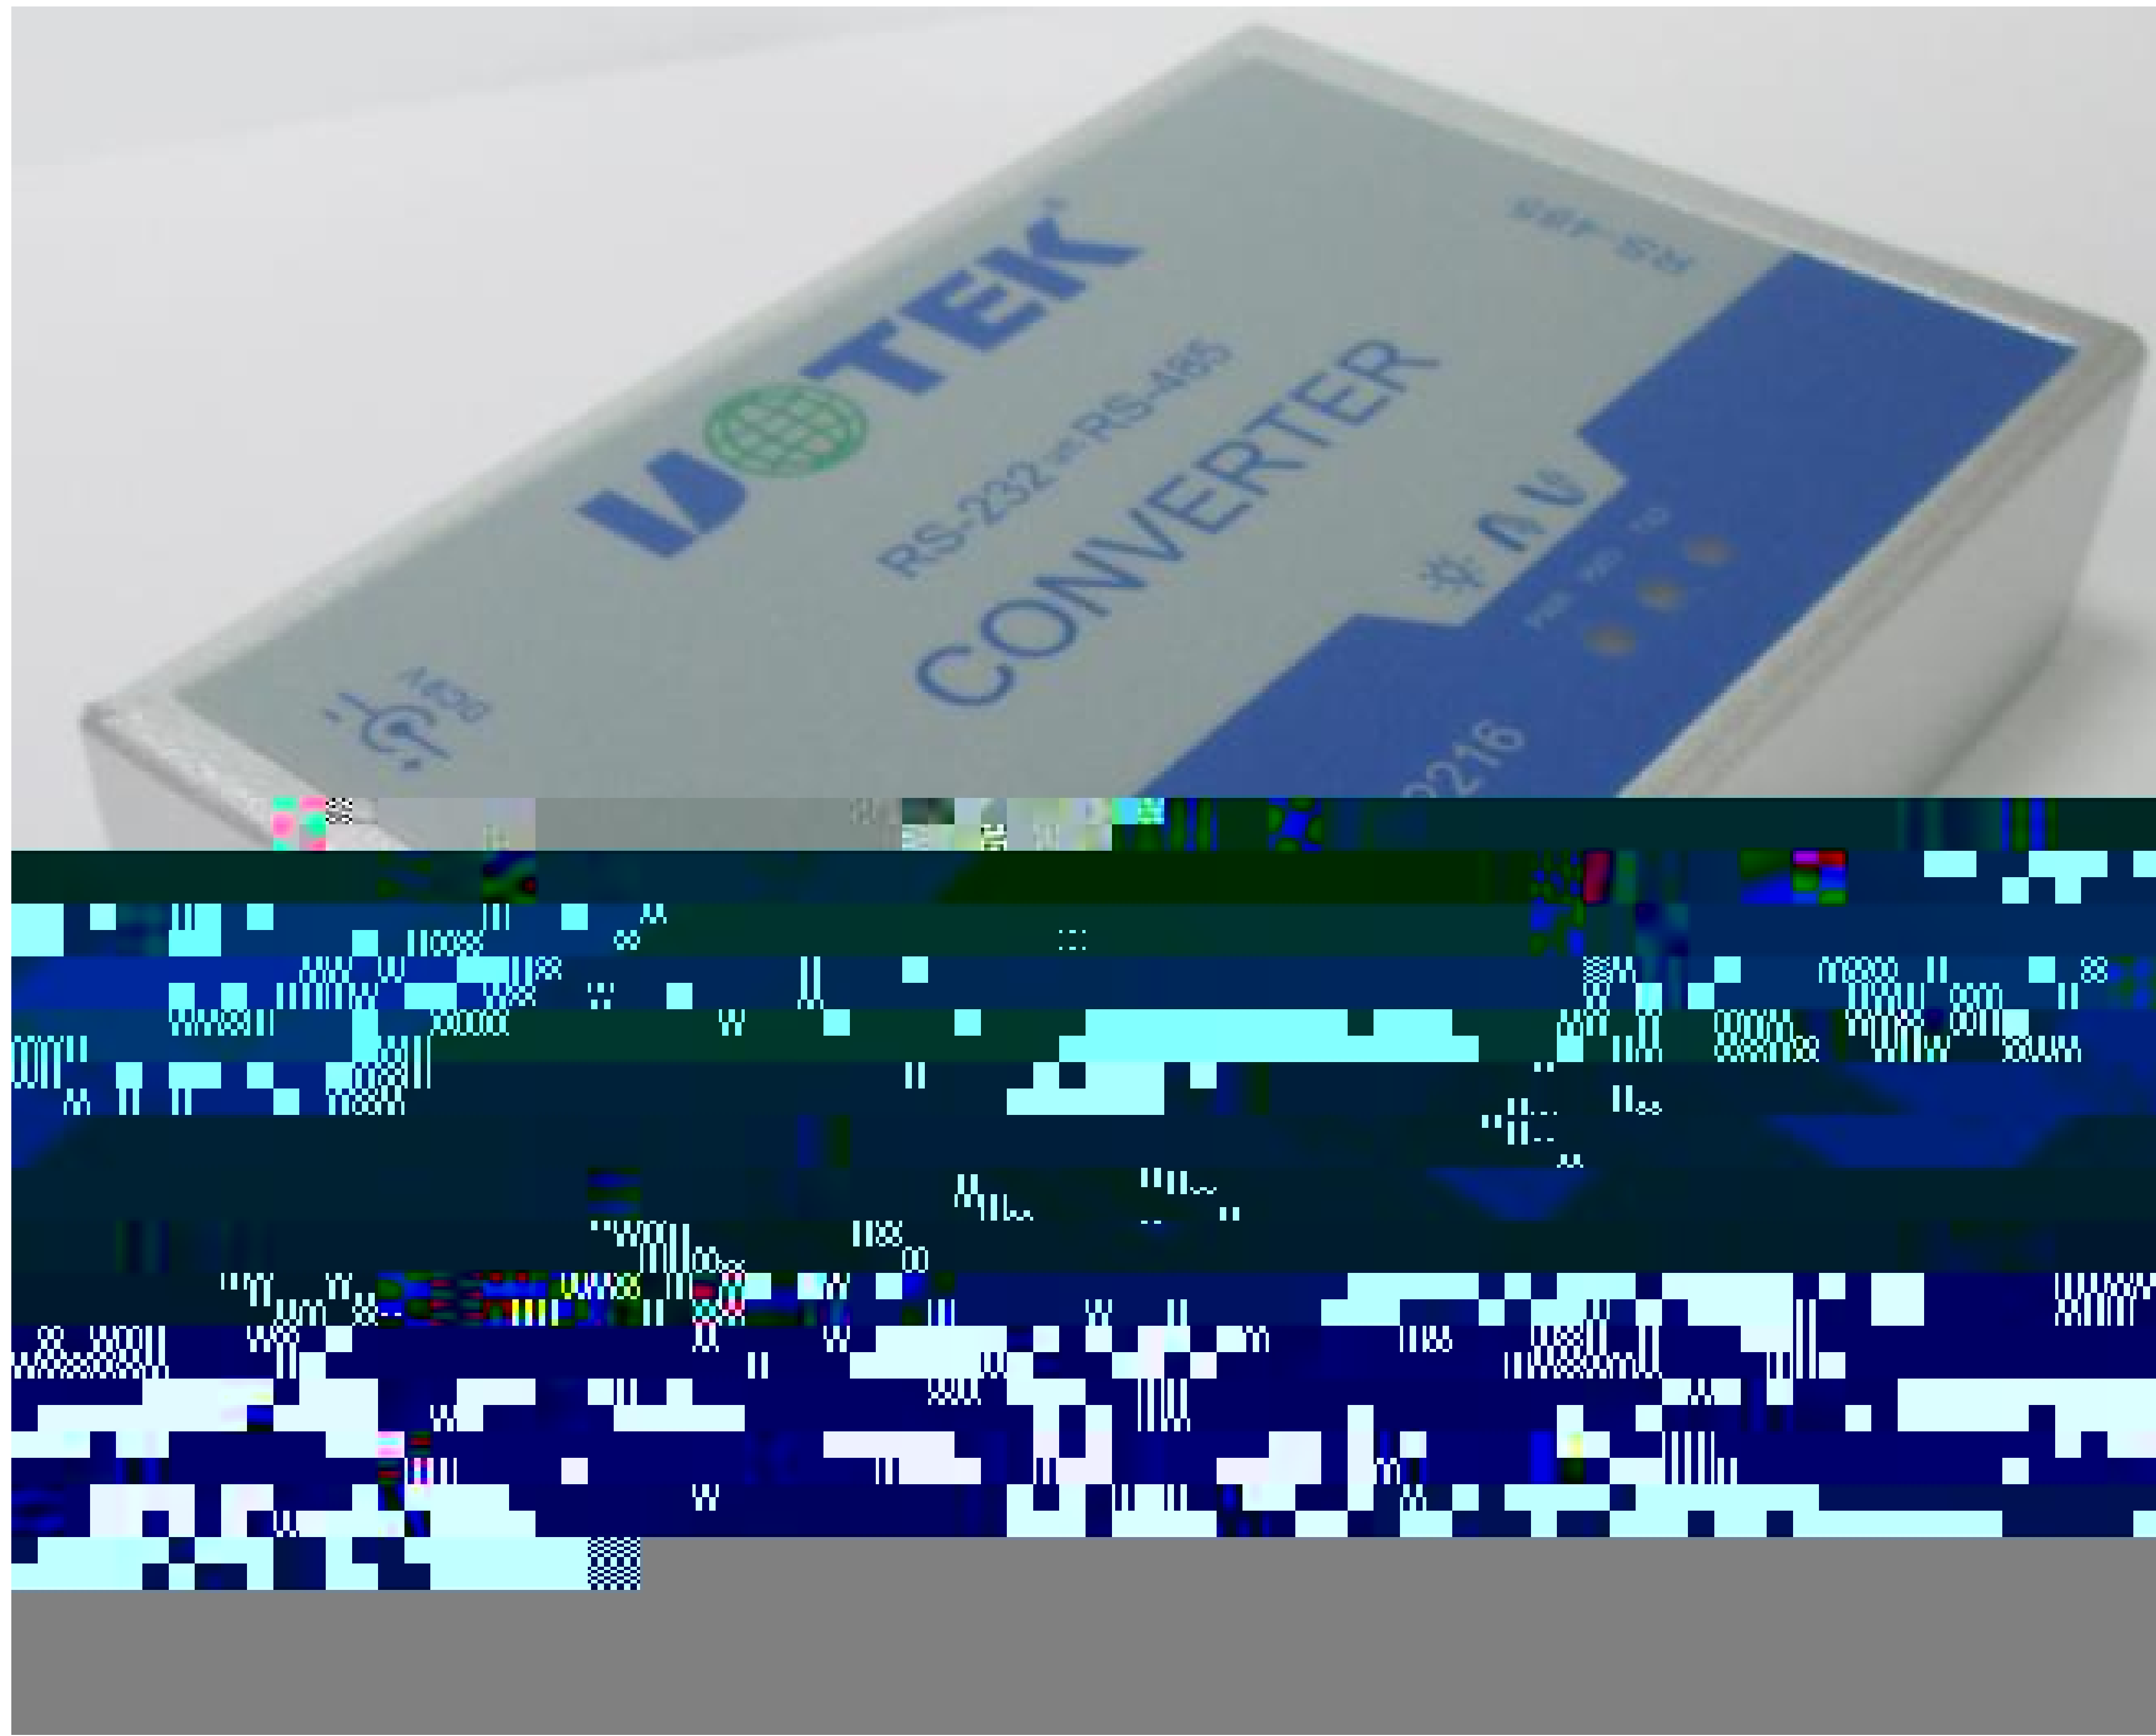

6.

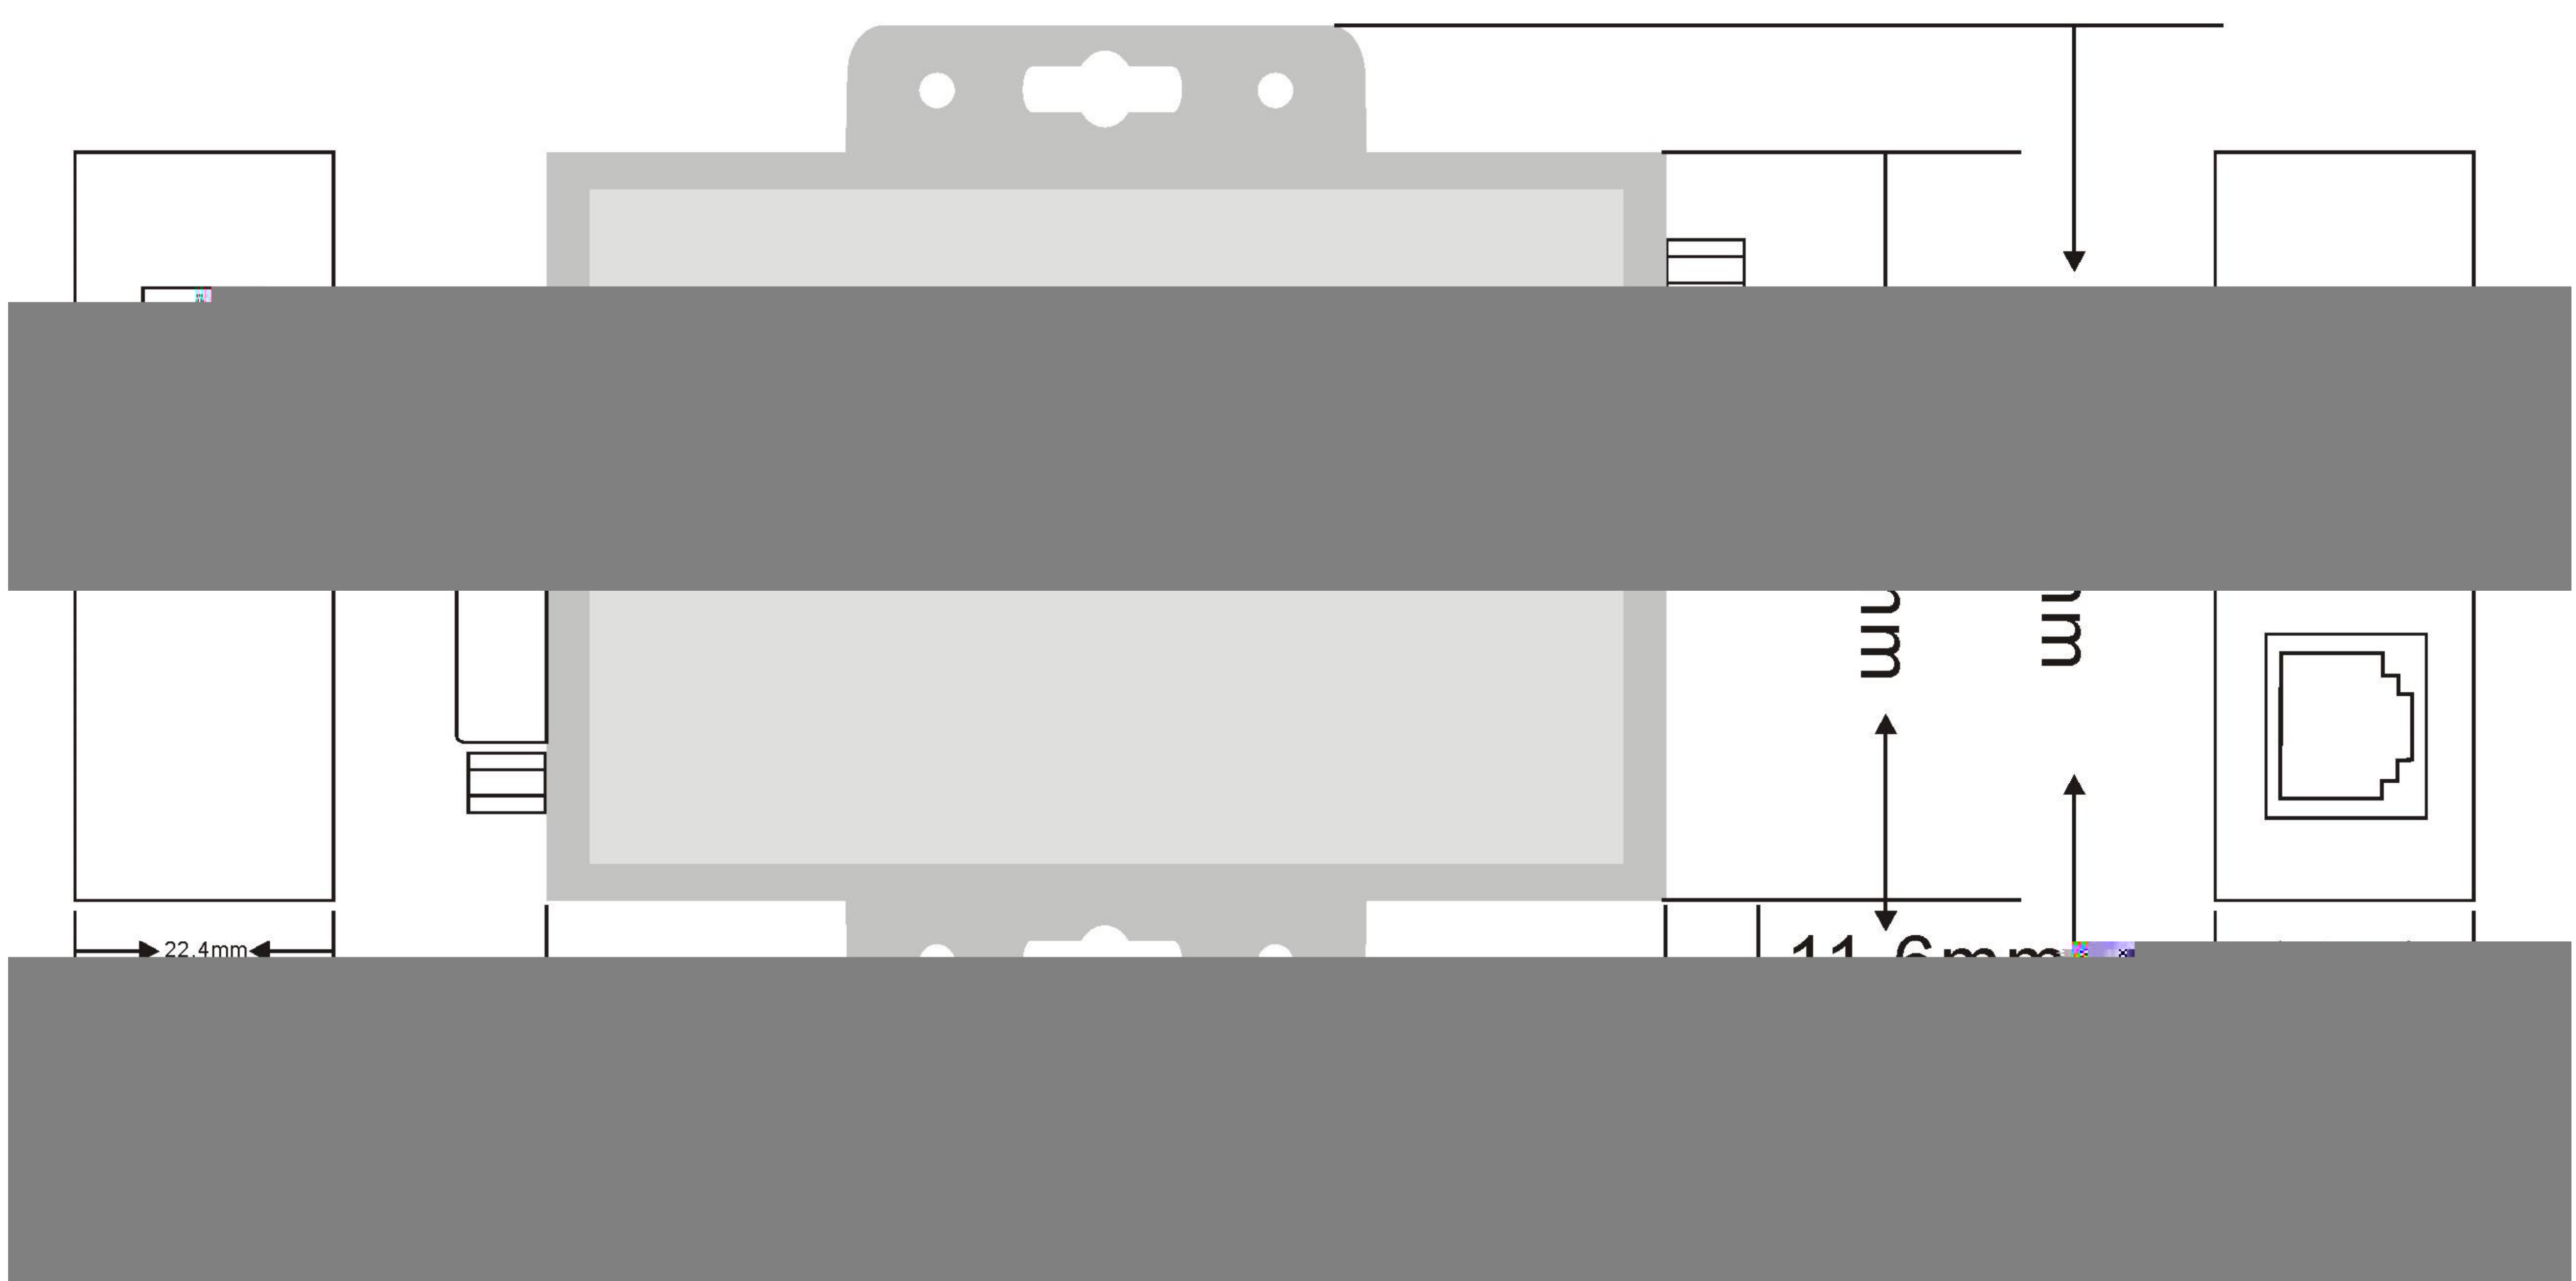


7.



8.

	1PCS
	1PCS
	1PCS
	1PCS
	1PCS
	1PCS

9.

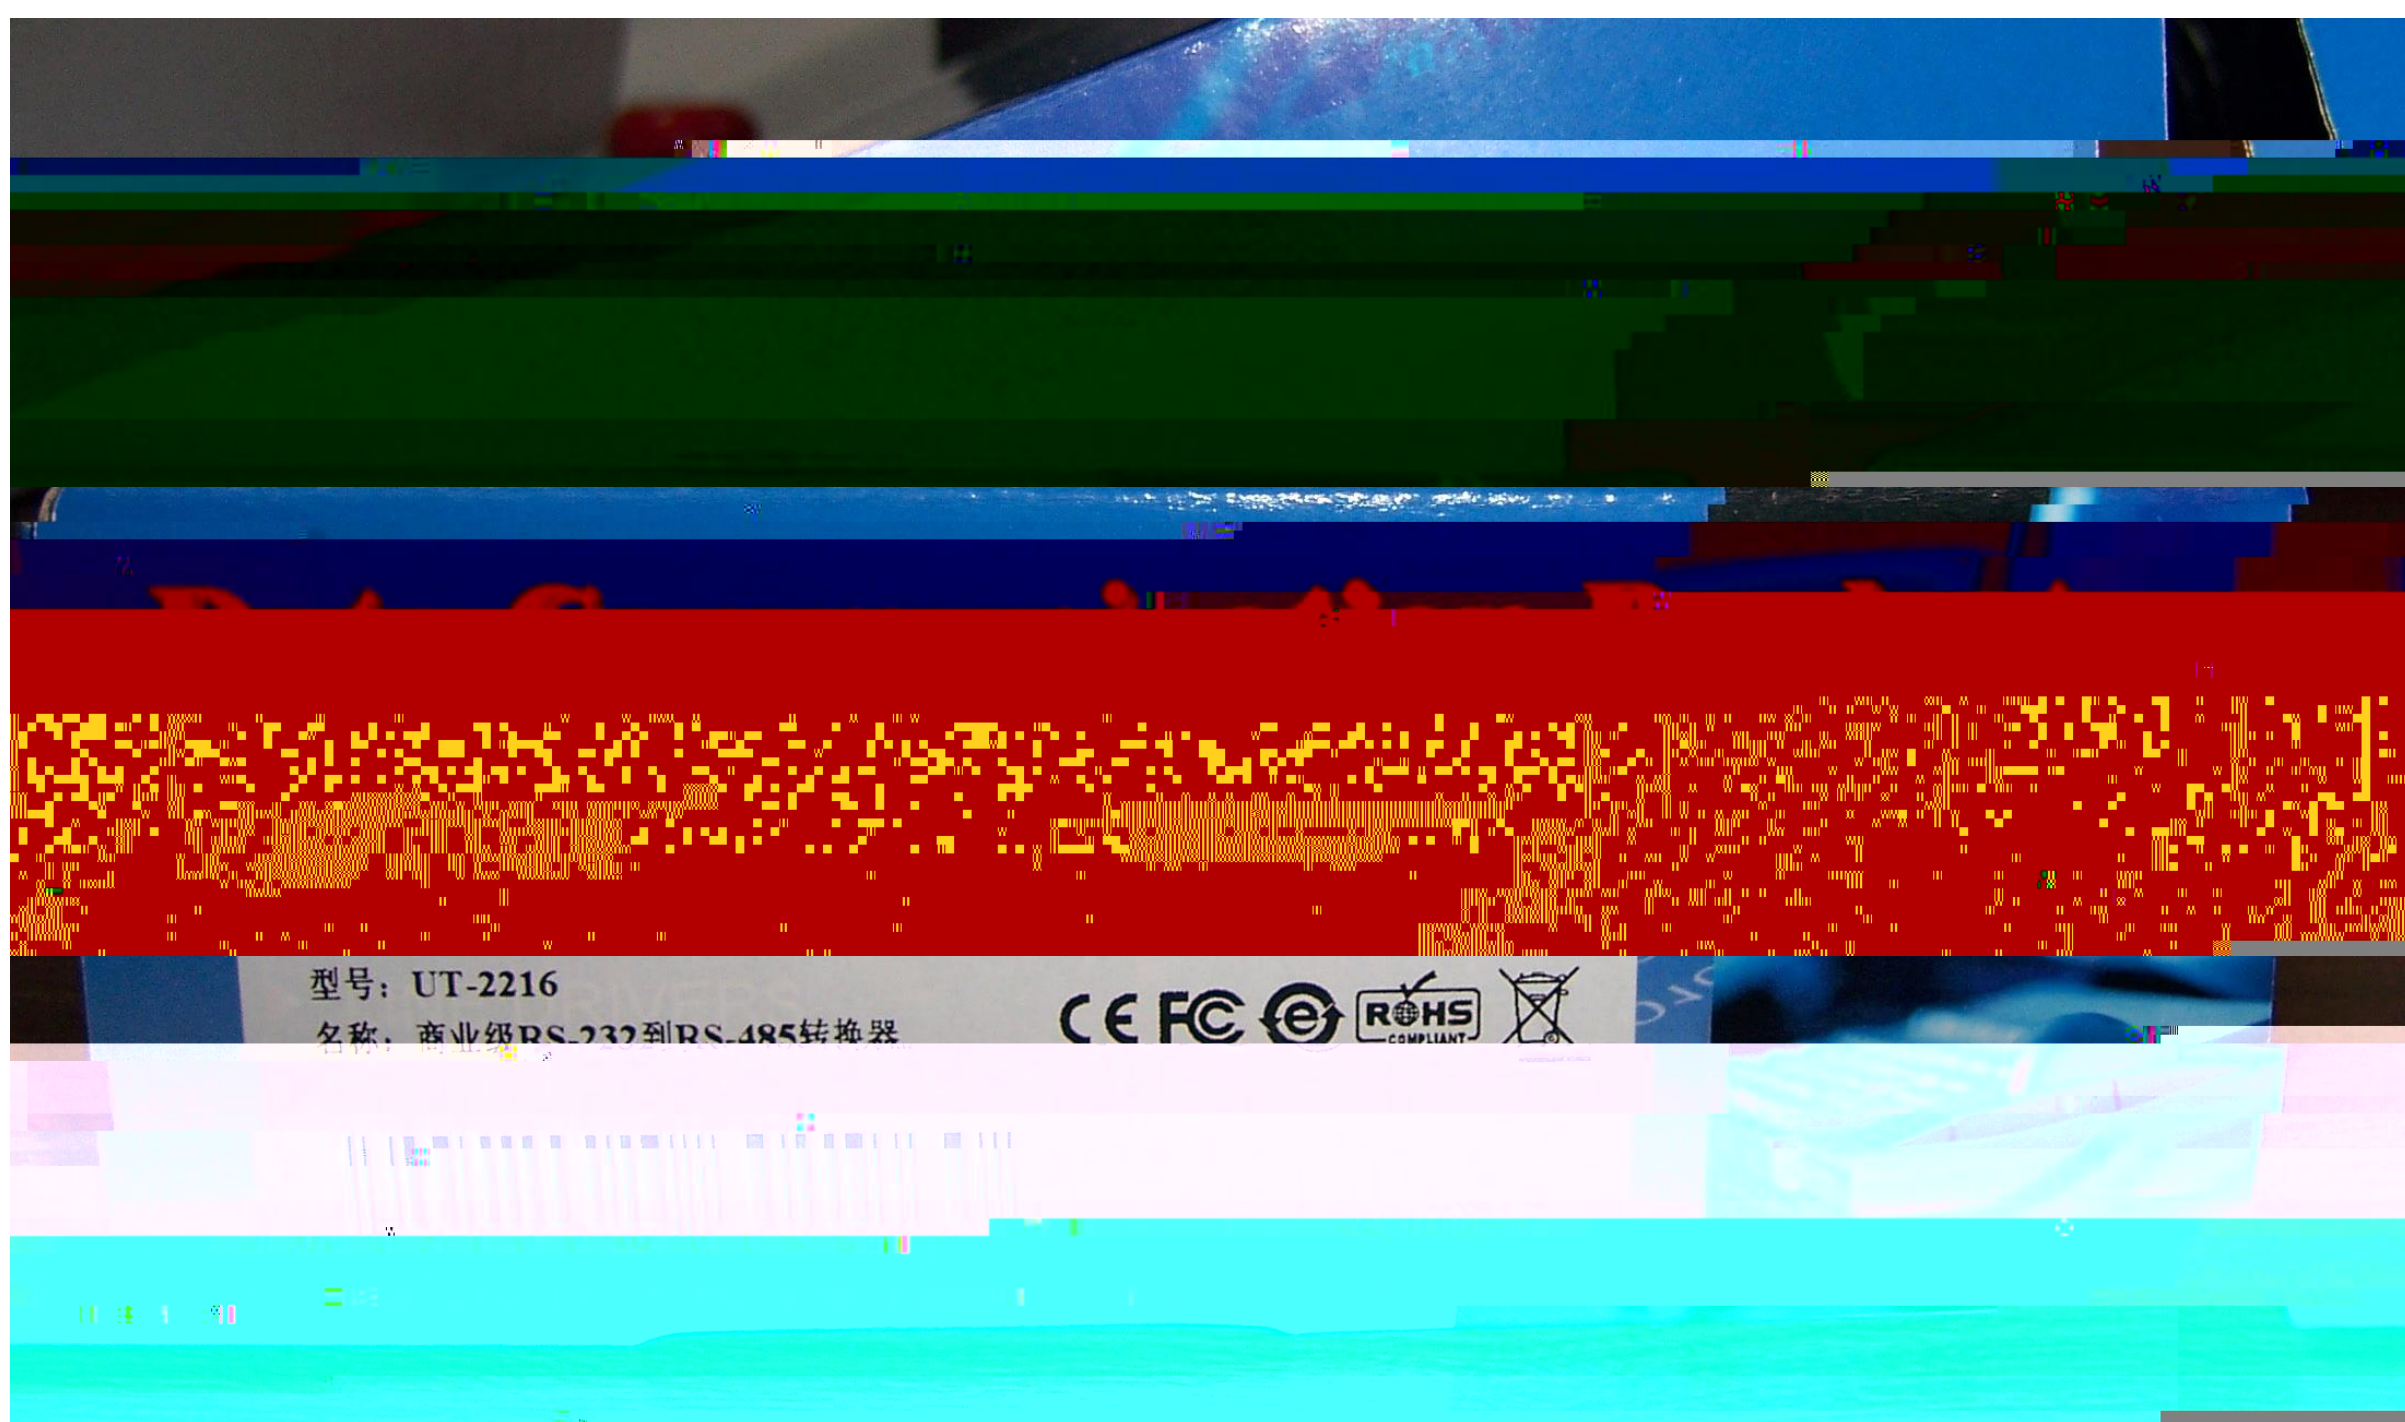

160 × 105 × 55mm ± 2mm

10.

-40 +85 , 5% 95%

11.

12.

13.