

# UT-794I

## 4 RS485/422 PCI-E

### 1

- **UIBK**
- **Logo IOTEK®**

### 2

- **UF 794I**
- **VER01**

### 3

- **4 RS485/422 PCI-E**

### 4


- **IR4 1**
- **X1 2.5Gbps RJ Express**
- **RS 422 TR- TR RD- RD GND**
- **RS 485 Data (A) Data (B) GND**
- **30Mbps 921.6Mbps**
- **5 6 7 8**
- **1 1.5 2**
- **Nre Even odd space Mkr**
- **RS/CIS XON/XOF**
- **120V/110V/110V**
- **-40 85**
- **250VNS 500C ID/DC**
- **RS 485/422 600W 15W**
- **RS 485/422 1.2M**
- **Win2000/XP/Vista/**
- **Win7/8/8.1/N4/0/CE4/2/5/0/6/0/xvols/Linu2/4/2/6**

## 5

1、DB9针型：RS-485/RS-422输出信号引脚分配(Port1-Port4)

DB9 针型 (PIN)	输出信号	RS-422全双工接线	RS-485半双工接线
1	T/R+	发(A+)	RS-485 (A+)
2	T/R-	发(B-)	RS-485 (B-)
3	RXD+	收(A+)	空
4	RXD-	收(B-)	空
5	GND	地线	地线
6	N/C		
7	N/C		
8	N/C		
9	N/C		

DB9针型




## 6



## 7

( )

## 8

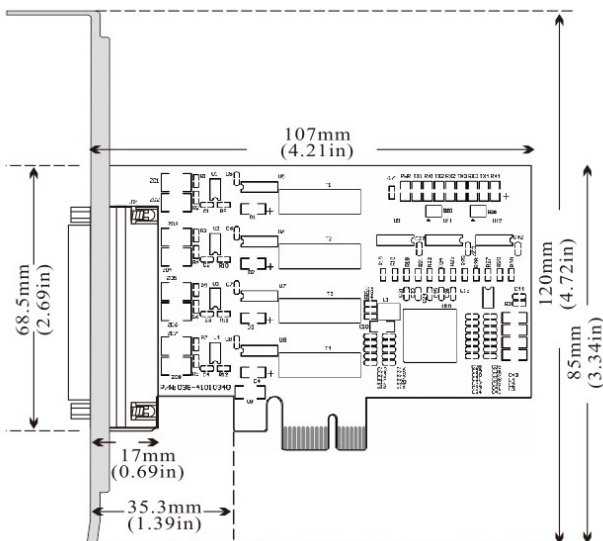

**9**

**10**


**11**



**250\*205\*5mm**

**:**

**12**

**13 / /**

**14**

**15**