

## UT-2003A

### USB/RS-485/RS-422 8port

#### 1.

- UTEK
- 
- Logo 

#### 2.

- UT-2003A
- VER: 01

#### 3.

- USB RS-485/RS-422

#### 4.

% USBV1.1 1.0 2.0 EIA RS-485 RS-422 ,  
 & USB VCC DATA+ DATA- GND FG  
 ' RS-485 T/R+ T/R- GND  
 ( RS-422 T/R+ T/R- RXD+ RXD- GND  
 ) & (  
 \* ž  
 + 300-128000bps,  
 , 128 RS-422 RS-485  
 - RS-485/422 5000 (9600bps ), USB )  
 10 600W ± 15KV  
 11 USB 6 , DB9  
 12 PWR TXD RXD  
 13  
 14 128000bps 300M  
 38400bps 2.4KM  
 9600bps 5KM  
 15 440mm× 201mm× 43mm  
 16 -25 70 5% 95%  
 17 0-5,000 128000bps-9600bps  
 18 Wi nXP/ Vi sta/Wi n7/8/8. 1/Li nux

5.


1 DB9 RS-485/RS-422

DB9 针型 (PIN)	输出信号	RS-422全双工接线	RS-485半双工接线
1	T/R+	发(A+)	RS-485 (A+)
2	T/R-	发(B-)	RS-485 (B-)
3	RXD+	收(A+)	空

DB9针型



USB-B USB

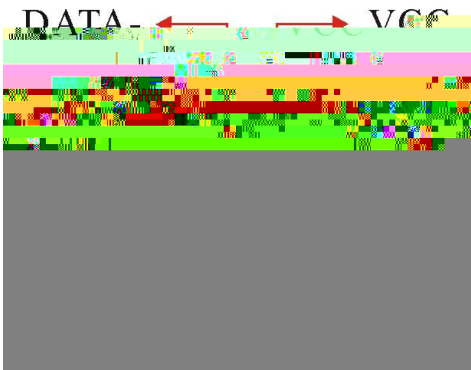


6.



7. fl t

8.

9.

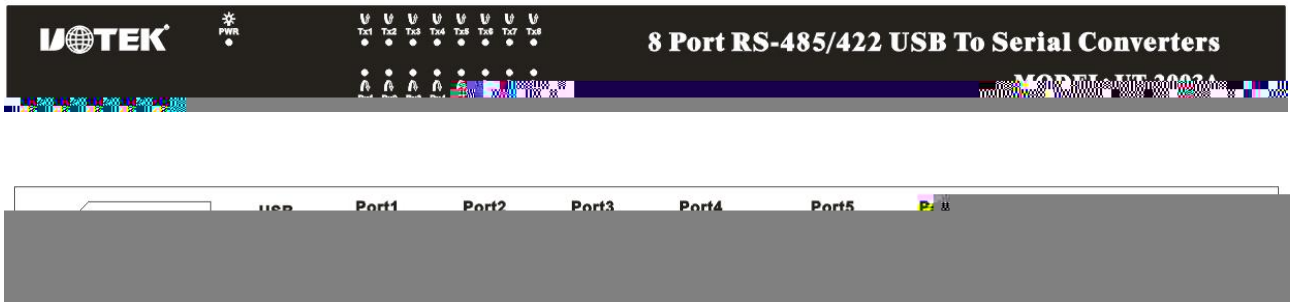

10.

	1PCS
	2PCS
	1PCS
	6PCS
	1PCS
	1PCS
	1PCS
USB	1PCS
	4PCS
	2PCS

11.



型号: UT-2003A

名称: CS转换器



540×280×108mm

12.

-40 +85 , 5% 95%

13. # #

14.

15.