

UT-2112

1	
1	
1	IJ TEK
1	
1	

1

1	EIA RS-2	232 C	CITT V.24		
2		DB9			
3					
4	2500Vrms	8	500VDC		
5	300bps-11	5200bp	S		
6	DC9V-48	V			
7	113mm	55mm	33mm		
8	150g				
9	-40 8	35		5%	95%

1




DB9	(PIN)	RS-232C
1		
2		SOUT (TXD)
	3	SIN (RXD)
	4	DTR
5		GND
	6	DSR
7		RTS
8		CTS
9		RI


DB9 (PIN)	RS-232C
1	
2	SIN (RXD)
3	SOUT (TXD)
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI








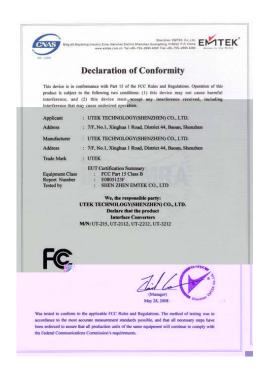

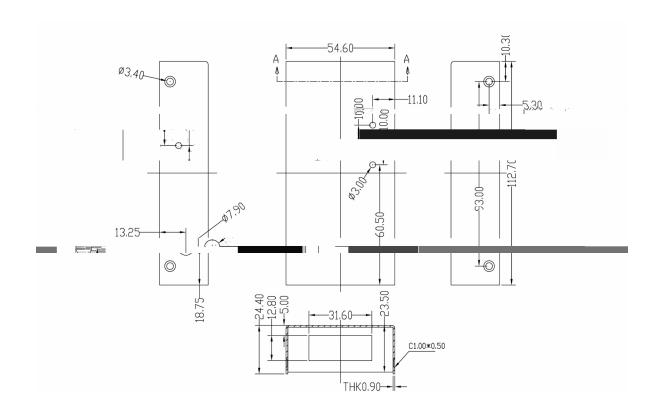



1PCS
1PCS



-40 +85 , 5% 95%