

UT-217E

RS-232 RS-485/422

1.

- UTEK
-
- Logo 

2.

- UT-217E
- VER: 01

3.

- RS-232 RS-485/422

4.


1	EIA/TIA	RS-232C	RS-485	RS422
2	RS-232	DB9	RS-485/422	RJ45
3	RS-232	+/-15KV ESD	RS-485/422	600W
4	2500Vrms	500DC		
5				
6		PWR	TXD	RXD
7				
8	115.2Kbps	300m		
	38.4Kbps	600m		
	9600bps	1.2Km		
9	93mm×74mm×22mm			
10	-25	70	5%	95%

5.

RS-232C

DB9 (PIN)	RS-232C
1	
2	SOUT (TXD)
3	SIN (RXD)
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI

RJ-45



RS-485/422


	RJ-45(PIN)		RS-485	RS-422
1	1	T/R+	RS-485(A+)	
2	2	T/R-	RS-485(B-)	
3	3	RXD+		
4	6	RXD-		
	4,5,7,8	GND		

6.



7. fl Ł

8.

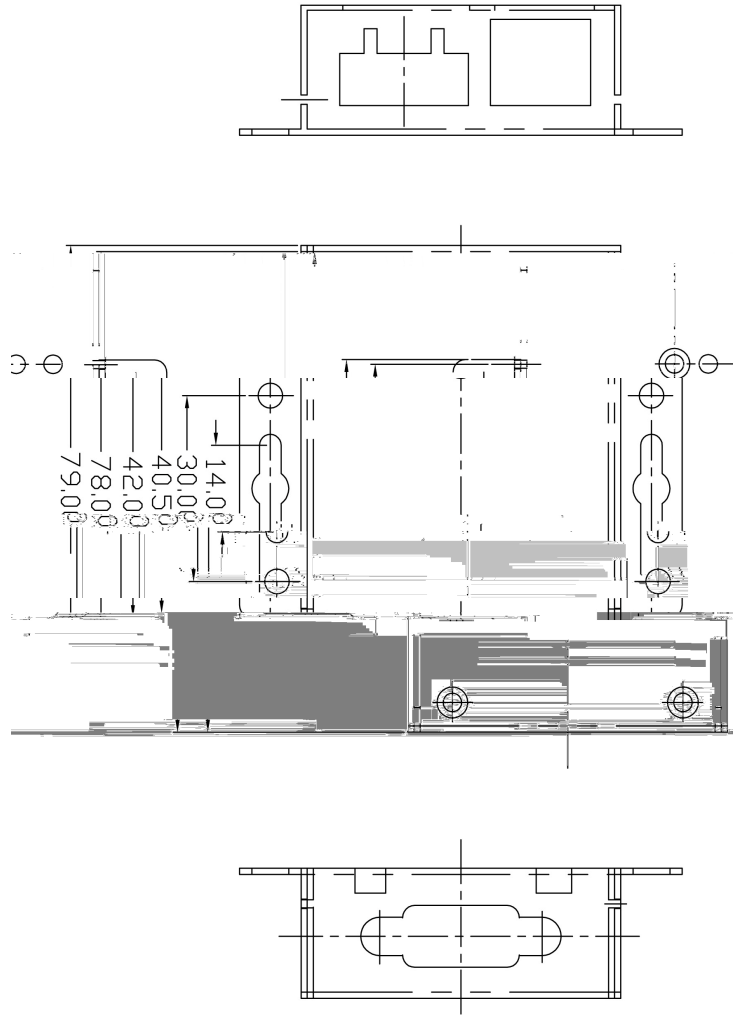

9.



10

Name	Number(unit)
Packing box	1PCS
Pearl cotton	1PCS
instructions	1PCS
Certificate of product	1PCS
Serial line	1PCS

11



160×105×55mm

12

-40 +85 , 5% 95%

13

#

14

15