

UT-G703

G. 703

1.

- UTEK
- Logo 

2.

- UT-G703
- VER: 01

3.

- UT-G703 G. 703 75ohm 120ohm

4.


ITU/CCITT G. 703 unstructured
 2.048Mbps
 75ohm BNC male or female(RG59 or 2002 coax)
 120ohm 8P8C RJ-45

5.

UT-G703 75ohm 120ohm

RJ-45(120ohm)	Jumper	Coax BNC(75ohm)
Pin3(TX Shield)	JP1	Tx OUT Shield
Pin6(RX Shield)	JP2	Rx OUT Shield

(注：产品出厂时已经断开 JP1，JP2。)



UT-G703

 (M F)
 RJ-45


(BNC BNC)

Signal	RJ-45 Description	DTE RJ45	BNC Description	DTE BNC
RxA	Receive Input Negative	1	Receive Input Tip	Tip
RxB	Receive Input Positive	2	Receive Ground Ring	Ring
TxA	Transmit Output Negative	4	Transmit Output Tip	Tip
TxB	Transmit Output Positive	5	Transmit Ground Ring	Ring
S1	Transmit Ground	3		
S2	Receive Ground	6		

6.



7.

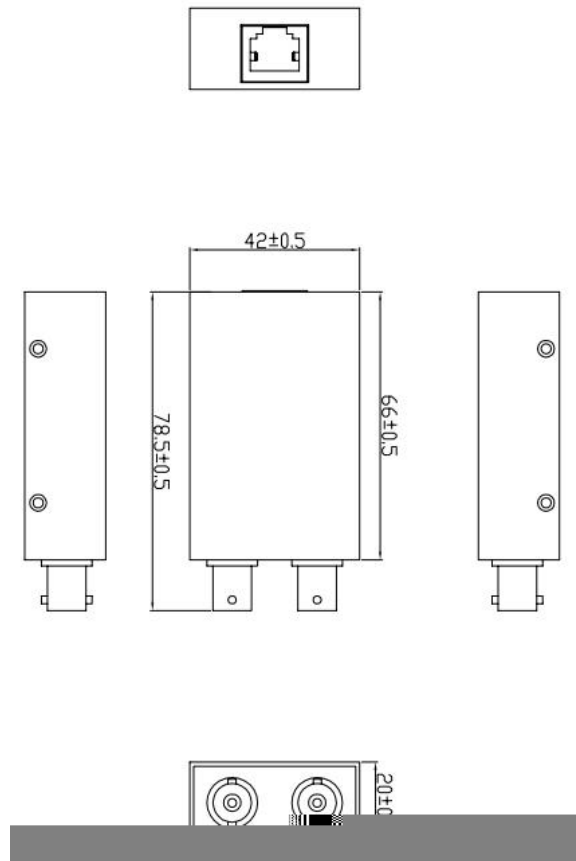


8.

9.

UT-G703	1PCS
	1PCS
	1PCS
	1PCS
	1PCS

10.

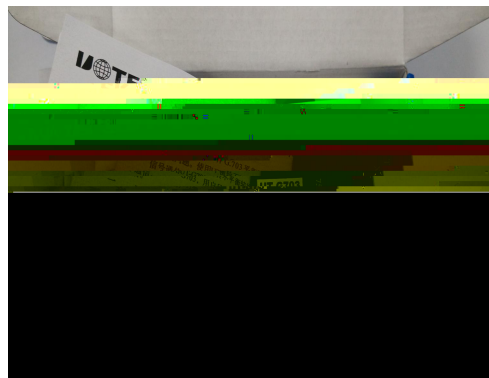

11.

-40 +85 , 5% 95%

12.

13.

14.