


UT-2604


UT-2604 4 100Base-TX
 1 100Base-FX
 -40~85 EMC

UT-2604SM-SC-220




6 P1 P2
 \$ 7
 % 8
 & 9
 5 10

mm

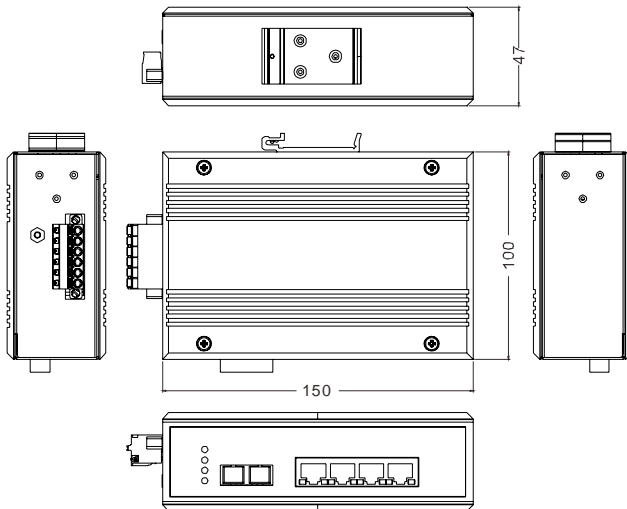


3.1 IEEE 802.3 IEEE 802.3u IEEE 802.3x
 3.2 1 100Base-FX SC ST FC SFP
 RJ45 4 10/100Base-TX / MDI/MDI-X
 LED PWR FDX
 1 4 RJ-45
 3.3 50/125 62.5/125
 8.3/125 9/125 10/125
 3.4 100m
 1310nm 20/40/60Km
 1550nm 80/100/120Km
 1310nm 2Km
 3.5 110/220VAC(88~264VAC)/50-60Hz or 110/220VDC
 (88~264VDC)
 3.6 5W
 1 6
 3.7 148810pps
 MAC 1K
 0.5Mbit
 1.2G
 3.8 150mm × 100mm × 47mm
 3.9 -40 85
 -40 85
 0 95%
 3.10 IP40
 3.11 EMI FCC Part 15 Subpart B classA EN55022 class A
 EMS IEC(EN)61000-4-2(ESD)
 IEC(EN)61000-4-3(RS)
 IEC(EN)61000-4-4(EFT)
 IEC(EN)61000-4-5(Surge)
 IEC(EN)61000-4-6(CS)
 IEC(EN)61000-4-8
 IEC 60068-2-27(Shock)
 IEC 60068-2-32(Freefall)
 IEC 60068-2-6(Vibration)

4.1 10/100Base-TX MDI/MDI-X



RJ45 MDI/MDI-X MDI PC
 1 2 3 6 1 3 2 6 3 1 6 2 MDI/MDI-X MDI/MDI-X 10/100Base-TX

	MDI	MDI-X
1	TX+	RX+
2	TX-	RX-
3	RX+	TX+
6	RX-	TX-
4 5 7 8	-	-



4.2 100Base-FX 100Base-FX

4.2.1 (50 62.5Å m)
 (9 10Å m)

4.2.2


		(MM)		(SM)		
光学特性	(T)	nm	1310	1310	1310	1550
		nm	1550	1550	1550	1550
	(R)	nm	1550	1550	1550	1550
		nm	1310	1310	1310	1490
	km	2	20	40	80	
	dBm	-15 -2	-15 -2	-5 0	-5 0	
	dBm()	-32	-34	-34	-34	
	dBm	-3	-3	-3	-3	
	dBm/km	0.5	0.5	0.3	0.25	
	10/100Mbps					

-SM-
-SC- SC
-40- 40km


LED

P1~P2		
FDX		
	RJ45	100M
	RJ45	100M
	RJ45	10M
	RJ45 Act/Link	10/100M
	RJ45	
FAIL		


6.1



6.2

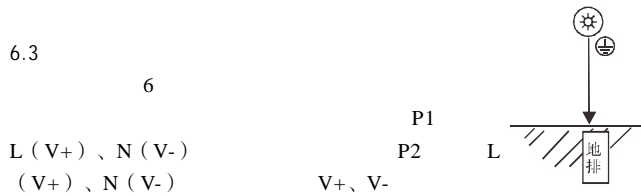


110/220VAC(88~264VAC)/50-60Hz or 110/220VDC (88~264VDC)。

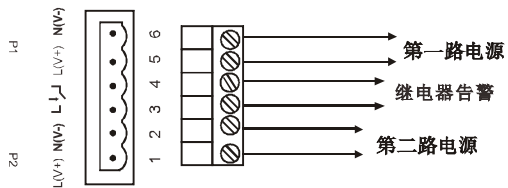

6.4



6.5

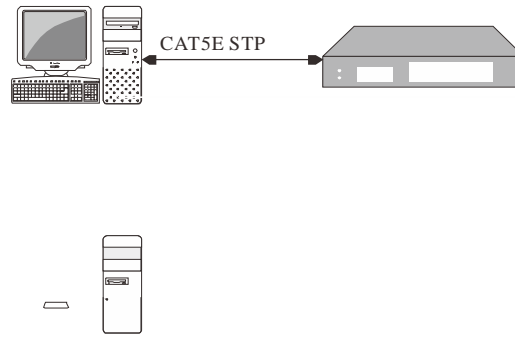

	1PCS
	2PCS
	6PCS
	1PCS
	1PCS
	1PCS