

:

**Model:UT-CN8301**

**USB RS-232**

\_\_\_\_\_


1.

- UTEK
- 
- Logo

2.

- UT-CN8301
- VER: 01

3.

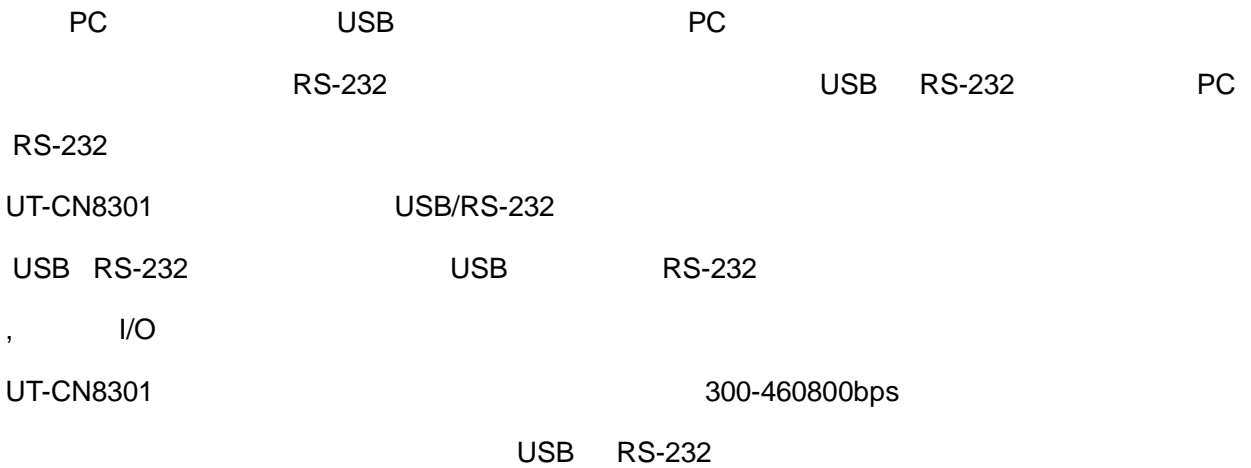

4.


- 1 USBV1.1 1.0 2.0 EIA RS-232 ,
- 2 USB VCC DATA- DATA+ GND FG
- 3 RS-232 DCD RXD TXD DTR GND DSR RTS CTS RI
- 4
- 5 ,
- 6 300-460800bps,
- 7
- 8 RS-232 5 USB 5
- 9 ± 15KV
- 10 USB A

11	2	TXD	RXD 1	POWER)
12				
13	3000mm× 33mm× 16mm			
14	-40	85	5%	95%
15	Win/11,10,8,7,VISTA,XP/SERVER 2022,2019,2016,2012,2008,2003/Linux			


5.

DB9 M(PIN)	
1	
2	SIN (RXD)
3	SOUT (TXD)
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	RI

DB9针型

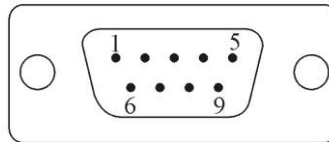

USB-A USB

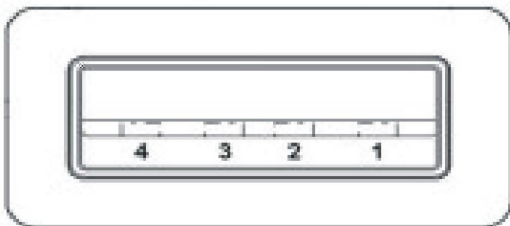

6.



10.

	1PCS
	1PCS
	1PCS
	1PCS

11.

177\*108\*28mm± 1mm

:

12.

-40 +85 , 5% 95%

13. / /

14.

15.